


RESULT THAT COUNTS

Easy to find in the catalogue: Adhesive tapes and solutions for the painting and building trades

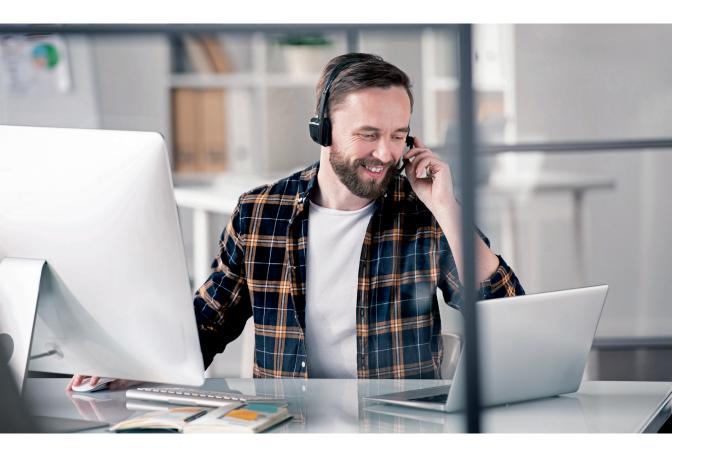

PERFECT RESULTS WITH PROFESSIONAL SUPPORT

How can projects be completed as efficiently as possible? With high-quality adhesive tapes of the best name-brand quality, of course. With the right tools, any job can be carried out cleanly and precisely.

We have brought together all tesa® Professional products here, sorted clearly according to application areas, so you can find the right tape quickly and easily, The efficient choice for perfect results!

Your tesa® Professional Team



THE PERFECT SOLUTION FOR EVERY APPLICATION

| Masking & protection indoors | Overview: Which tape does what indoors? Indoor products Pro Tip: Choosing the correct tape Pro Tip: Correct application, including on special surfaces | 6 – 15 9 |
|---------------------------------|---|-------------|
| Masking & protection outdoors | Overview: Which tape does what outdoors? | 18 – 27 |
| Repairing | Overview: Which repairing to use and when | 30–35 |
| Floor laying & mounting | Overview: Which tape does what in floor laying & mounting? Products for floor laying & mounting Pro Tip: Drill-free mounting Pro Tip: Optimal storage | 38-47 41 |
| Marking & insulation | Overview: Which tape does what in marking & insulation?Products for marking & insulation | |
| Packaging & sealing | Overview: Which tape does what in packaging and sealing?Products for packaging & sealing | |
| When it's the price that counts | Overview: Which tape does what among the affordable alternatives? When it's the price that counts – affordable alternatives | |
| Technical specifications | Detailed product information | |



Different interior surfaces require different products. But one requirement is always the same: absolutely efficient, clean work indoors.



Which tape does what indoors?

| | Product number | Adhesion to smooth surfaces | Adhesion to rough surfaces | Quality of the paint edge | Adhesion duration (indoors) | Page |
|--|---|-----------------------------|----------------------------|---------------------------|------------------------------|------|
| 1 ES I | 4334 tesa ® Precision Mask PLUS | ••• | *** | | 26 weeks 8 weeks outdoors | 6 |
| | 4344 tesa® Precision Mask Standard | • | *** | •••• | 3 months 4 weeks outdoors | 7 |
| tesa tesa | 4333 tesa® Precision Mask Sensitive | | | •••• | 14 days | 7 |
| | 4338 tesa® High-Performance Mask | •••• | •••• | *** | 4 weeks 7 days outdoors | 8 |
| CONTROL OF THE PARTY OF THE PAR | 4306 tesa® Profi PLUS Masking Tape | ••• | *** | •••• | 14 days 3 days outdoors | 8 |
| | 4348 tesa® Painter's Tape | •••• | *** | *** | 7 days | 9 |
| | 4331 tesa® Silicone Masking Tape | •••• | *** | •••• | 2 months 4 weeks outdoors | 10 |
| | 4319 tesa® Masking Tape for Curves | ••••• | •••• | •• | 7 days | 11 |
| | 60101 tesa® Fibreglass Tape | •• | | - | Permanent | 11 |
| Sar Court I | 4365 tesa Easy Cover® Precision PLUS | ••• | *** | •••• | 26 weeks 8 weeks outdoors | 12 |
| To Saw B | 4402 tesa Easy Cover® Precision Standard | •• | *** | **** | 3 months 4 weeks outdoors | 13 |
| | 4401 tesa Easy Cover® Precision Standard Paper | •• | *** | •••• | 3 months | 13 |
| | 4451 tesa Easy Cover® Spray | •• | *** | •••• | 3 months | 14 |
| Section Sectio | 4368 tesa Easy Cover® Universal | •••• | *** | ••• | 7 days | 14 |
| Service Servic | 4364 tesa® Easy Cover Paper | •••• | *** | ••• | 7 days | 15 |

Precise masking for extremely flat, razor-sharp paint and varnish edges



Where? On smooth and lightly textured surfaces

Why? Translucent backing enables accurate

positioning, consistent adhesive guarantees

perfect results

Result Flat, razor-sharp paint edges



| Dimensions and packaging | | | | | | | | | |
|--------------------------|-------|-------|-------|-------|-------|-------|--|--|--|
| m:mm | 50:9 | 50:19 | 50:25 | 50:30 | 50:38 | 50:50 | | | |
| Rolls IP/PU | 12/96 | 8/48 | 6/36 | 5/30 | 4/24 | 3/18 | | | |
| PU/Pallet | 75 | 80 | 80 | 80 | 80 | 80 | | | |
| 6 months 8 weeks | | | | | | | | | |

tesa® Precision Mask® Standard 4344

Professional masking for sharp edges when using paint or varnish



- Clean paint edges
- > Transparent and easy to reposition
- Residue-free removal for up to 3 months indoor and 4 weeks outdoor



Where? Smooth and lightly textured surfaces

Why? Thin, flat paper backing guarantees great

results and residue-free removal

Result Sharp paint and varnish edges



| Dimensions and packaging | | | | | | | | |
|------------------------------------|------|------|------|------|------|--|--|--|
| m:mm 50:19 50:25 50:30 50:38 50:50 | | | | | | | | |
| Rolls IP/PU | 8/48 | 6/36 | 5/30 | 4/24 | 3/18 | | | |
| PU/Pallet | 80 | 80 | 80 | 80 | 80 | | | |
| | | | | | | | | |



tesa® Precision Mask® Sensitive 4333

For demanding paint work on sensitive surfaces



- > Low Tack Masking Tape
- > Easy to use
- > Thin and tear-resistant
- Residue-free removal, even from sensitive surfaces such as various wallpapers and freshly painted surfaces



Where? On smooth, sensitive surfaces such as

decorative wallpaper, veneer skirting boards and coatings that have not

completely dried

Why? Unharmed sensitive surfaces and extra

sharp paint edges

Result In-tact surfaces and extra-sharp, precise

varnish and paint edges

| Dimensions and packaging | | | | | | | |
|--------------------------|-------|-------|-------|-------|-------|--|--|
| m:mm | 50:19 | 50:25 | 50:30 | 50:38 | 50:50 | | |
| Rolls IP/PU | 8/48 | 6/36 | 5/30 | 4/24 | 3/18 | | |
| PU/Pallet | 70 | 70 | 70 | 70 | 70 | | |
| | | 120 | | | | | |









tesa® High-Performance Mask 4338

Smooth masking tape for demanding paint masking applications



- > Strong adhesion, good binding of paints and fillers
- > High tear resistance
- > Bright green colour is extremely visible
- > Easy to tape curves



Where? On all stable surfaces (not for sensitive

surfaces such as wallpaper, veneer skirting

boards, old paintwork)

Why? Strong adhesion for up to 6 drying cycles

Result Precise paint and varnish edges on straight

lines, curves and cambers

| Dimensions and packaging | | | | | | | | |
|--------------------------|--------|----------------|--------|--------|--------|--|--|--|
| m:mm | 50:19* | 50:25 * | 50:30* | 50:38* | 50:50* | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | | | |
| PU/Pallet | 24 | 24 | 24 | 24 | 24 | | | |









*without printed label

tesa® Profi PLUS Masking Tape 4306

For optimal paint edges of long, straight lines



- > Convenient, fast masking
- > Easy, clean removal
- Accurate results
- > Can be used for 14 days indoors and 3 days outdoors




Where? Smooth and lightly textured surfaces

Why? High handling comfort due to smooth paper backing and easy removal

Result Optimal paint edges

| Dimensions and packaging | | | | | | | |
|--------------------------|-------|-------|-------|-------|-------|--|--|
| m:mm | 50:19 | 50:25 | 50:30 | 50:38 | 50:50 | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | | |
| PU/Pallet | 36 | 36 | 36 | 36 | 36 | | |
| | | | | | | | |

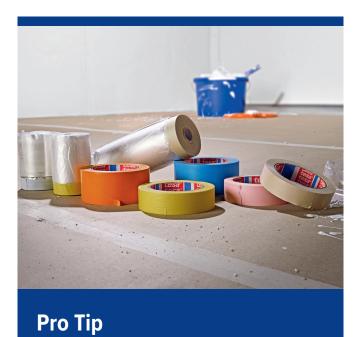

Choosing the correct tape

Each application presents its own specialised requirements for adhesive tapes. That's why it's important to know about the kind of surface, the working environment and the duration of use before choosing and applying a masking tape.



Consider the following when choosing your product:

- What is the surface like?
 Different tapes are optimised for smooth, lightly textured or rough surfaces.
- Will the tape be used indoors or outdoors?
 Each tape reacts differently to temperature, weather and UV-exposure.
- How long will the tape remain on the surface?
 Not every tape can or should be applied indefinitely.
- What work will be performed while the tape is in place?

Paint application and demanding applications such as plastering work require specially designed tapes.

tesa® Painter's Tape

4348

Universal application for all standard masking jobs



- Good initial tack
- > Tear-resistant and slightly stretchy
- > Good adhesive properties
- Can be used indoors for 7 days



Where? Smooth and lightly textured surfaces

Why? Ensures good adhesion

Result Good paint and varnish edges



| Dimensions and packaging | | | | | | | |
|--------------------------|------------------------------|-------|-------|------|------|--|--|
| m:mm | 50:19 50:25 50:30 50:38 50:5 | | | | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | | |
| PU/Pallet | 36 | 36 | 36 | 36 | 36 | | |







tesa® Silicone Masking Tape 433°

Sharp paint edges on siliconised surfaces



- Very high stability and tear resistance
- > Suitable for plaster and sandblasting work
- > High heat-resistance
- Supple
- > Easy to remove



Where? On siliconised surfaces, paints treated with

anti-mold ingredients and vinyl

Why? Normal adhesive tapes will not adhere to

these surfaces

Result Strong adhesion, flush paint and varnish

edges

| Dimensions and packaging | | | | | | | | |
|--------------------------|--------|--------|--------|--------|--------|--|--|--|
| m:mm | 50:19* | 50:25* | 50:30* | 50:38* | 50:50* | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | | | |
| PU/Pallet | 32 | 32 | 32 | 32 | 32 | | | |







*without printed label



Pro Tip

Use on special surfaces

Outdoor plastic surfaces can age significantly as a result of weather and environmental conditions. PVC windows and door frames often develop a brittle, chalky surface. Avoid creating noticeable streaks when removing the tape. We recommend testing an area beforehand using a strip of transparent tesafilm®: apply firmly to the surface and remove quickly. The residues on the tesafilm® provide information about the degree of weathering of the material and any dirt stuck in the pores.



Our recommendation:

- Perform an adhesion test with transparent tesafilm®.
- Advise that it may not be possible to carry out professional adhesion on these surfaces.
- Offer cleaning of the profile as an additional service.

Anti-adhesive surfaces, sealants and silicone profiles, Teflon, polyethylene and polypropylene are often found outdoors. For these applications you will need specialty adhesive tapes.

tesa® Masking Tape for Curves 4319

Masking of curves and creative wall design



- Very supple and flexible
- > Easily torn by hand
- > Excellent adhesion
- High adhesion on rough surfaces
- > Always apply stretched to avoid colour bleed



Where? Smooth to rough surfaces

Why? The tape can be easily applied to curves or

cambers

Result Curves taped quickly in one operation

| Dimensions and packaging | | | | | | | | |
|--------------------------|--------|--------|--------|---------------|------|--|--|--|
| m:mm | 50:19* | 50:25* | 50:30* | 50:30* 50:38* | | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | | | |
| PU/Pallet | 16 | 16 | 16 | 16 | 16 | | | |







*without printed label

tesa® Fibreglass Tape 60101

Sealing of joints, holes and cracks in drywall



- > Light adhesion
- > Repositionable
- > High tear-resistance



Where? At panel joints and repair points

Why? The fibreglass cloth tape adheres equally

well to most surfaces – even rough

surfaces

Result Flush fillings without cracks

| Dimensions and packaging | | | | | | | | |
|--------------------------|-------|-------|-------|--------|--|--|--|--|
| m:mm | 25:48 | 45:48 | 90:48 | 45:100 | | | | |
| Rolls IP/PU | -/48 | -/48 | -/48 | -/24 | | | | |
| PU/Pallet | 36 | 24 | 24 | 24 | | | | |





CAN BE USED OUTSIDE FOR 8 WEEKS PROFESSIONAL Easy Cover® Precision Stank 1,4m = 46,2m² Precision Stank 3,3m x 0,55 m = 18,15 m² O,55 m

Extremely sharp edges & large-area protection in one step



- Combination of translucent, supple film and tesa® Precision Mask 4334 PLUS
- > Suitable for airless applications
- > Flat, sharp paint and varnish edges
- Residue-free removal for up to 6 months indoor and 8 weeks outdoor

Where? Smooth and lightly textured surfaces

indoors and outdoors

Why? Translucent backing enables good

positioning, uniform adhesion guarantees

perfect results

Result Razor-sharp, flat paint and varnish edges

and a clean working area

| Dimensions and packaging | | | | | | | |
|-------------------------------------|------|------|------|------|--|--|--|
| m:mm 33:550 33:1400 33:2100 17:2600 | | | | | | | |
| Rolls IP/PU | 8/64 | 8/32 | 8/32 | 8/32 | | | |
| PU/Pallet 24 24 20 20 | | | | | | | |













tesa EasyCover® Precision Standard Film 4402

Sharp paint edges & large-area protection in one step



- > Clean paint edge
- > Transparent and easy to reposition
- Residue-free removal for up to 3 months indoor and 4 weeks outdoor
- > Suitable for airless applications



Where? Smooth and lightly textured surfaces

Why? Thin, flat paper backing guarantees great

results and residue-free removal

Result Sharp paint and varnish edges



| Dimensions and packaging | | | | | | |
|--------------------------|-------------|---------|-------------|-------------|--|--|
| m:mm | 33:550 | 33:1400 | 33:2100 | 17:2600 | | |
| Rolls IP/PU | -/25 | -/20 | -/20 | -/20 | | |
| PU/Pallet | 72 | 48 | 40 | 48 | | |
| | | | | | | |

tesa Easy Cover® Precision Standard Paper 4401

Mask and protect skirting boards, window sills and door frames



- > Clean paint edges
- > Transparent and easy to reposition
- Residue-free removal for up to 3 months indoor and 4 weeks outdoor
- > Suitable for airless applications



Where? Smooth and lightly textured surfaces

Why? Thin, flat paper backing guarantees great

results and residue-free removal

Result Sharp paint and varnish edges



| Dimensions and packaging | | | | | |
|--------------------------|--------------|------|--|--|--|
| m:mm 25:180 25:300 | | | | | |
| Rolls IP/PU | - /25 | -/20 | | | |
| PU/Pallet 72 48 | | | | | |
| | | | | | |









tesa Easy Cover® Spray

4451

Fast masking protection for spray applications



- > Double taped for efficient and secure masking
- Residue-free removal for up to 3 months indoor and 4 weeks outdoor
- > Suitable for airless applications



Where? Handrails, window sills, door frames, stair

stringers and skirting boards

Why? Time-saving large-area masking and

protection in one step

Result Flush and precise paint edges



| Dimensions and packaging | | | | |
|--------------------------|------------|--|--|--|
| m:mm | 25: 200 | | | |
| Rolls IP/PU | 10/20 | | | |
| PU/Pallet | 48 | | | |
| | 0 20-30 mm | | | |

tesa Easy Cover® Universal

4368

Fast, large-area protection with clean paint edges



- > tesa® Painter's Tape quality
- > Secure hold due to 19 mm wide adhesive strip
- > Embossed film for secure binding of paints



Where? Smooth and lightly textured surfaces

Why? This 2-in-1 solution enables time-saving

large-area masking and protection in one

sten

Result Sharp paint edges and a clean working area



| Dimensions and packaging | | | | | | | |
|--------------------------|--------|---------------------------|---------|---------|---------|----------|----------|
| m:mm | 33:300 | 33:550 | 33:1100 | 33:1400 | 33:1800 | 33: 2100 | 17: 2600 |
| Rolls IP/PU | 10/60 | 10/60 | 10/20 | 10/20 | 10/20 | 10/20 | 10/20 |
| PU/Pallet | 24 | 24 | 36 | 36 | 36 | 36 | 36 |
| 7 days all p | paints | 1 19 mm 10 µm НОРЕ | | | | | |

Correct application

No matter how good our tapes are, if you ignore the condition and cleanliness of the application surface, the quality of the bond can suffer considerably. Contamination from dust, moisture, grease or oils is critical and should definitely be removed.

Pro Tip



Clean surface = good adhesion



Dirty surface = poor adhesive contact due to e.g. dust, moisture, oils or grease



Important: press firmly!

It is also important to press down firmly on the edge of the tape when applying. For reliably perfect masking results and clean paint edges without leaks or bleeds.



Another important factor is the ambient temperature during application. The range from 5 °C to 40 °C is ideal for adhesion. During the colder months, the adhesive tapes should be stored at a moderate temperature (> 15 °C). Adhesion is significantly reduced at lower application temperatures. For extreme applications, the winter tapes Premium Plastering Tape 4843 and PE Plastering Tape 4845 (page 24) can be used at 0 °C or -15 °C.

Ideal temperature range



tesa® Easy Cover® Paper

4364

Large-area masking and protection for painting and spray painting



Specially coated paper binds paint and varnishes

 Combination of special high-quality paper and tesa® Masking Tape



Where? Smooth and lightly textured surfaces

Why? This 2-in-1 solution enables time-saving large-area masking and protection in one

sten

Result Clean paint and varnish edges, reliable

binding of paint to the protective paper



| Dimensions and packaging | | | | | |
|--------------------------|--------|--------|--|--|--|
| m:mm | 25:180 | 25:300 | | | |
| Rolls IP/PU | 10/40 | 10/20 | | | |
| PU/Pallet | 36 | 24 | | | |
| | • | | | | |









Our weather resistant, robust tapes and protective films enable you to work faster and cleaner – complete with residue-free removal. Also perfect for reliable protection of plaster and facades!



Which tape does what outdoors?

| | Product number | Adhesion to smooth surfaces | Adhesion to rough surfaces | Quality of the paint edge Hand tearability | UV-resistance (outdoors) | Page |
|--|---|-----------------------------|----------------------------|--|--|------|
| | 4440 tesa® Precision Mask Outdoor UV PLUS | *** | *** | ***** | 26 weeks | 18 |
| Marchael Marchael | 4411 tesa® Easy Cover UV precision | *** | *** | - | 26 weeks | 19 |
| | 4438 tesa® UV Surface Protection Tape | | - | | 12 weeks | 19 |
| | 4370 tesa® Cloth Duct Tape UV Extra | •••• | *** | | 8 weeks | 20 |
| | 4363 tesa® Plastering Cloth Tape UV | | *** | | 3 weeks | 20 |
| | 4621 tesa® Multi-purpose Outdoor Cloth Tape | *** | *** | ***** | 8 weeks | 21 |
| | 4398 tesa® Basic Outdoor Cloth Tape | | **** | | 10 days | 21 |
| The state of the s | 4373 tesa® Easy Cover UV Extra Strong | | *** | - | 8 weeks | 22 |
| Torrange of the state of the st | 4369 tesa® Easy Cover UV | •••• | ** | - | 3 weeks | 23 |
| | 4498 tesa® Easy Cover UV Basic | ***** | **** | - | 10 days | 23 |
| | 4843 tesa® Premium Plastering Tape Orange | •• | ** | **** | 2 weeks | 24 |
| Description of the second of t | 4845 tesa® Professional PE Plastering Tape | ••• | | **** | 12 weeks | 24 |
| tosay | 67001 tesa® s-PVC Plastering Tape Embossed | *** | | **** | 6 weeks | 25 |
| COST COST COST COST COST COST COST COST | 66001 tesa® s-PVC Plastering Tape Smooth | ••• | | **** | 6 weeks | 25 |
| COS CONTROL CO | 60399 tesa® s-PVC Plastering Tape Standard, Smooth | ••• | - | **** | 2 weeks | 26 |
| TOTAL STATE OF THE | 4836 tesa® Double-Sided Masking Tape | | - | **** | 6 weeks | 27 |
| | 4848 tesa ® Surface Protection Film | •• | - | _ _ | 4 weeks | 27 |
| | 4843 tesa® Premium Plastering Tape Orange 4845 tesa® Professional PE Plastering Tape 67001 tesa® s-PVC Plastering Tape Embossed 66001 tesa® s-PVC Plastering Tape Smooth 60399 tesa® s-PVC Plastering Tape Standard, Smooth 4836 tesa® Double-Sided Masking Tape 4848 tesa® Surface Protection Film | ••• | • | | 2 weeks 12 weeks 6 weeks 2 weeks 6 weeks | 2 |

Perfect painting and varnishing results



- > Thin, tear-resistant specialty paper
- > Supple and reliable
- > Semi-transparent for exact positioning
- > UV-resistant for 26 weeks
- > For door and window frames as well as shutters
- Surfaces such as PVC (including old PVC), glass, aluminium, anodised aluminium, wood and lightly textured surfaces (e.g. mortar and grout)



Where? Smooth and lightly textured surfaces

Why? Highly weatherproof and UV-resistant adhesive

and backing material

Result Easy removal without unwanted tearing



CAN BE USED

6 MONTHS

| Dimensions and packaging | | | | | | |
|--------------------------|-------|-------|-------|-------|-------|--|
| m:mm | 50:19 | 50:25 | 50:30 | 50:38 | 50:50 | |
| Rolls IP/PU | 8/48 | 6/36 | 5/30 | 4/24 | 3/18 | |
| PU/Pallet | 80 | 80 | 80 | 80 | 80 | |
| 26 weeks | | | | | | |

tesa Easy Cover® UV Precision

4411

Time-saving large-area protection in one step



- Ideal for door and window frames as well as shutters
- Specially designed for surfaces such as PVC, glass, aluminium and wood
- Sharp and precise paint edges for even more precision
- Suitable for airless applications
- UV-resistant for 26 weeks



Where? On smooth and lightly textured surfaces

outdoors

Why? This practical 2-in-1 solution is suitable

for several working stages thanks to its

26 weeks of UV-resistance

Result Clean, sharp paint and varnish edges

| Dimensions and packaging | | | | | | |
|-----------------------------|------|------|------|--|--|--|
| m:mm 33:550 33:1400 17:2600 | | | | | | |
| Rolls IP/PU | 8/64 | 8/32 | 8/32 | | | |
| PU/Pallet | 18 | 18 | 24 | | | |









tesa® UV Surface **Protection Tape**

4438

For painting, varnishing and light plastering work



- Moisture-resistant, stable backing material
- Weather resistant, resilient to aging
- UV-resistant for 12 weeks
- Easily removable
- > Also suitable for natural, varnished or stained wooden surfaces



Where? Smooth and lightly textured surfaces such

as wooden beams in lattice frameworks

(e.g. clay plaster)

Why? Particularly suitable for outdoor painting

jobs, external insulation protection, facade renovation and use with water-soluble

acrylic paints

Result Clean, straight paint & varnish edges with

particularly stable surface protection

| Dimensions and packaging | | | | | | | |
|--|-------|-------|-------|------|------|--|--|
| m:mm 50:19* 50:25* 50:30* 50:38* 50:50 | | | | | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 3/18 | | |
| PU/Pallet | 24 | 24 | 24 | 24 | 56 | | |









*without printed label

tesa® Cloth Duct Tape **UV Extra**

4370

Reliable long-term protection of valuable surfaces



- UV-resistant for 8 weeks
- Strong adhesion even on rough surfaces
- Easy to tear by hand
- Extremely tear-resistant
- > Easy, clean removal
- > Mesh: 70 threads/inch²



Where?

Smooth and sensitive surfaces such as window frames and facade elements as

well as concrete blocks

Why? Specially developed for facade renovations,

plaster and gypsum

Result Optimally protected surfaces



| Dimensions and packaging | | | | | |
|--------------------------|--------|--------|--|--|--|
| m:mm | 25:25* | 25:50* | | | |
| Rolls IP/PU | 1/48 | 1/24 | | | |
| PU/Pallet | 32 | 32 | | | |
| Colours | | | | | |









*without printed label

tesa® Plastering Cloth **Tape UV** 4363

Reliable protection of valuable surfaces



- UV-resistant for 3 weeks
- Strong adhesion even on rough surfaces
- Easy to tear by hand
- Waterproof and usable from 5 °C
- **>** Easy to remove
- > Mesh: 65 threads/inch²



Where? Smooth and sensitive surfaces such as

window frames and facade elements

Why? Perfect protection of sensitive surfaces,

e.g. in construction work

Result Well-protected surfaces



| Dimensions and packaging | | | | | | |
|--------------------------|-------|-------|-------|--|--|--|
| m:mm | 25:30 | 25:38 | 25:50 | | | |
| Rolls IP/PU | 6/42 | 6/36 | 6/24 | | | |
| PU/Pallet | 36 | 30 | 36 | | | |
| Colours | | | | | | |









tesa® Multi-purpose Outdoor Cloth Tape 4621

Easy masking for plaster work and various applications



- > UV-resistant for 8 weeks
- Residue-free removable from many surfaces inc. wooden floors and concrete
- Usable at temperatures up to +90 °C
- Tearable by hand lengthways and crossways
- Mesh: 100 threads/inch²



Where? On all surfaces such as facades, walls,

floors and cables

Why? Clean edges for painting and plastering

indoors and outdoors

Result Clean plaster work indoors and outdoors

| Dimensions and packaging | | | |
|--------------------------|-------|-------|--|
| m:mm | 25:50 | 50:50 | |
| Rolls IP/PU | 1/30 | 1/36 | |
| PU/Pallet | 45 | 36 | |
| Colours | | | |











tesa® Basic Outdoor Cloth Tape

4398

The basic solution with strong adhesion for surface protection



- > UV-resistant for 10 days
- > Extremely strong adhesion
- > Easy to tear by hand
- Mesh: 55 threads/inch²



Where? Smooth and rough surfaces such as window

frames and facade elements

Why? Reliable protection of surfaces, e.g. in

construction work

Result Well-protected surfaces



| Dimensions and packaging | | |
|--------------------------|-------|-------|
| m:mm | 25:30 | 25:50 |
| Rolls IP/PU | 16/48 | 12/36 |
| PU/Pallet | 30 | 24 |
| Colours | | |







CAN BE USED OUTSIDE FOR 8 WEEKS PROFESSIONAL EASY COVER® WEXTRA Strong PREMIUM Talmx1,4m=16,8m² Talmx0,55m=6,6m² Talmx0,55m=6,6m²

2-in-1 solution for masking and protecting in one step



- Particularly robust thanks to the combination of extra strong LDPE film and durable cloth tape
- Crystal-clear, supple film suitable for tempered and UV-coated windows
- > UV-resistant for 8 weeks
- > Mesh: 70 threads/inch²

Where? Components such as windows and facade

elements and masking on APL

Why? Optimal combination of an especially thick, transparent film with premium protective cloth

tape

Result Reliably protected surfaces even in the event of

heavy use

all paints

| This product is also available as tesa® Cloth Duct Tape UV Extra 4370 on page 20. |
|---|
| |

| Dimensions and packaging | | | |
|--|--------|---------|---------|
| m:mm | 12:550 | 12:1400 | 12:2600 |
| Rolls IP/PU | 8/64 | 8/32 | 8/32 |
| PU/Pallet | 18 | 15 | 9 |
| 70 mesh Salam Sala | | | |

tesa Easy Cover®

4369

tesa Easy Cover® **UV** Basic

4498

Efficient masking and covering of large areas for external plaster work



- Highly resilient thanks to robust, embossed HDPE film and UV-resistant cloth tape
- Suitable for spray plaster applications
- For use with all paint types
- UV-resistant for 3 weeks





Where? Components such as windows and facade

Why? This practical 2-in-1 solution ensures stable

protection outdoors while minimising work-

ing steps

Result Reliably protected surfaces, even after thick

or multiple coatings



| | Dii | mensions | and pac | kaging | | |
|-------------|--------|----------|---------|---------|----------|---------|
| m:mm | 14:550 | 14:1100 | 14:1400 | 14:1800 | 14: 2100 | 14:2600 |
| Rolls IP/PU | 8/64 | 8/64 | 8/32 | 8/32 | 8/32 | 8/32 |
| PU/Pallet | 15 | 15 | 15 | 15 | 15 | 15 |









Efficient masking and covering of large areas with extremely strong adhesion



- Highly resilient thanks to robust HDPE film and UV-resistant cloth tape
- Extremely strong adhesion
- UV-resistant for 10 days
- Mesh: 55 threads/inch²



Where? Smooth and rough surfaces such as window

frames and facade elements

Why? This practical 2-in-1 solution ensures stable

protection while minimising working steps

Result Reliably protected surfaces, even after thick

or multiple coatings



| Dimensions and packaging | | | |
|--------------------------|--------|---------|---------|
| m:mm | 20:550 | 20:1400 | 17:2600 |
| Rolls IP/PU | 20/80 | 10/40 | 10/20 |
| PU/Pallet | 20 | 20 | 36 |







tesa® Premium Plastering Tape Orange 4843

Protection for painting, stucco and plastering work – even in cold weather



- UV-resistant for 2 weeks
- Can be used at temperatures ≥ 0°C
- > Resistant to acids and other chemicals
- Very good curve adhesion (indoors and outdoors)
- Very good conformability



Where? Smooth and lightly textured surfaces

Why? Insensitive to moisture and resistant to cold,

weak alkalis and acids as well as many

chemicals

Result Reliably protected surfaces

| Dimensions and packaging | | | |
|--------------------------|-------|-------|-------|
| m:mm | 33:30 | 33:50 | 33:75 |
| Rolls IP/PU | 10/60 | 6/36 | 4/24 |
| PU/Pallet | 40 | 40 | 40 |
| Colours | | | |
| | | | |

tesa® Professional PE Plastering Tape 4845

Protection for painting, stucco and plastering work – even at sub-zero temperatures



- > UV-resistant for 12 weeks
- > Temperature-resistant from -40 °C to +60 °C
- > Applicable from -15 °C to +30 °C
- Polyethylene (PE) is more environmentally friendly plastic that is recyclable
- > Environmentally friendly



Where? All smooth surfaces, especially PVC

windows and doors

Why? Insensitive to moisture and resistant to cold,

weak alkalis and acids as well as many

chemicals

Result Clean, sharp masking of plastered areas

| | Dimensions and packa | ging |
|-------------|----------------------|-------|
| m:mm | 33:30 | 33:50 |
| Rolls IP/PU | 10/60 | 6/36 |
| PU/Pallet | 40 | 40 |
| Colours | | |
| 12 Weeks | | |

tesa® s-PVC Plastering Tape Embossed 67001

Protection during painting and plastering work



- > UV-resistant for 6 weeks
- > Application from +5 °C to +60 °C
- > Suitable for smooth and lightly textured surfaces
- > Embossed backing for straight, hand-torn edges



Where? Components such as windows and facade

elements

Why? Quick and clean 90° angle tears due to

embossed grooved backing

Result Precisely masked plaster surfaces

M STC

| Dimensions and packaging | | | |
|--------------------------|-------|-------|--|
| m:mm | 33:30 | 33:50 | |
| Rolls IP/PU | 10/60 | 6/36 | |
| PU/Pallet | 40 | 40 | |
| Colours | | | |
| | | | |

tesa® s-PVC Plastering Tape Smooth 66001

Protection during painting, stucco and plastering work



- > UV-resistant for 6 weeks
- > Application from +5 °C to +60 °C
- > Suitable for smooth and lightly textured surfaces
- > Hand-tearable



Where? All smooth surfaces

Why? Insensitive to moisture and resistant to cold,

weak alkalis and acids as well as many

chemicals

Result Clean, sharp masking of plastered areas

| Dimensions and packaging | | |
|--------------------------|-------|-------|
| m:mm | 33:30 | 33:50 |
| Rolls IP/PU | 10/60 | 6/36 |
| PU/Pallet | 40 | 40 |
| Colours | | |
| 6 weeks | | |

tesa® s-PVC Plastering Tape Standard, Smooth

Short-term protection for painting, stucco and plastering work



- UV-resistant for 2 weeks
- Application from +5 °C to +60 °C
- Suitable for lightly textured surfaces



Where? Short-term work (2 weeks) on smooth and

lightly textured surfaces

Why? Insensitive to moisture and resistant to cold,


weak alkalis and acids as well as many

chemicals

Clean, sharp masking of plastered areas Result

| Dimensions and packaging | | |
|--------------------------|-------|-------|
| m:mm | 33:30 | 33:50 |
| Rolls IP/PU | 10/60 | 6/36 |
| PU/Pallet | 40 | 40 |
| Colours | | |
| | | |



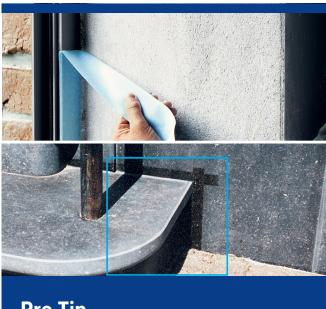

Pro Tip

Bonding to metal and natural stone

On these surfaces, the use of adhesive tapes often leads to discolouration and unwanted residues.



Metal surfaces

Chemical reactions often occur after using adhesive tapes on metal surfaces, especially in combination with copper, zinc and lead. The tape may therefore only be applied for a short time. Choose a narrow adhesive tape and do not cover the entire surface.

Use a porous covering material (e.g. covering fleece) to avoid waterlogging and subsequent discoloration.

Anodised aluminium finishes

Removal of adhesive tape can often leave residues on anodised surfaces of inferior quality (e.g. window and door profiles, roller shutters and rails). Test the adhesive tape on a small area or perform the "ink test" beforehand: Dampen the surface with an ink-soaked rag. If ink residues remain visible after a second wiping-over, the surface is poorly sealed.

In that case, it is recommended using high-quality adhesive tapes such as tesa® 4331 or tesa® 4440.

Artificial and natural stone

The use of adhesive tapes is generally not recommended for these surfaces. Problems occur frequently. Cover these surfaces with porous fleece or plywood panels instead.

tesa® Double-Sided Masking Tape 4836

Masking and protection of large areas outdoors



- Double-sided adhesive
- > UV-resistant for 6 weeks
- > Residue-free removal
- > Secure hold of the protective film
- > Practical, double-sided tack
- Exercise caution with old PVC, as discolouration may occur



Where? On window frames and other valuable

components

Why? Allows customised masking for the

protection of sensitive surfaces

Result Efficient masking and protection of large

areas

| Dimensions and packaging | | |
|--------------------------|-------|--|
| m:mm | 25:25 | |
| Rolls IP/PU | 12/48 | |
| PU/Pallet | 32 | |
| Colours | | |
| | | |



tesa® Surface Protection Film 4848

Masking and protection of windows and construction elements



- > Fast, easy handling
- Resistant to moisture, mechanical damage and many chemicals
- > Environmentally friendly PE-film
- > UV-resistant for 4 weeks
- Not for use on weathered plastic, old paintwork, coated glass panes or raw metal. In these cases, we recommend tesa® 4373 and 4440.



Where? On smooth surfaces such as glass, frames

and similar surfaces

Why? Protection of sensitive surfaces at

temperatures from -10 to +60 $^{\circ}\text{C}$

Result Sturdy protection for large areas

| Dimensions and packaging | | | | | | | |
|---|------|-----|-----|-----|-----|--|--|
| m:mm 100:125 100:250 100:500 100:750 100:1000 | | | | | | | |
| Rolls IP/PU | 1/18 | 1/9 | -/4 | 1/3 | -/2 | | |
| PU/Pallet | 27 | 27 | 27 | 27 | 27 | | |
| Colours | | | | | | | |
| | | | | | | | |









Weather resistant, robust, temperature-resistant – these tapes ensure optimal protection of valuable surfaces as well as quick and easy repair work of all kinds.



Which repairing to use and when

| | Product number | Adhesion to smooth surfaces | Adhesion to rough surfaces | Product thickness | Hand tearability | Page |
|--|--|-----------------------------------|----------------------------|-------------------|------------------|------|
| | 4651 tesa® Premium Cloth Tape | | **** | •••• | ***** | 30 |
| | 4688 tesa® PE Coated Cloth Tape | •••• | *** | •••• | | 30 |
| Trans | 4663 tesa® Premium Duct Tape | | | •••• | *** | 31 |
| COSO / CONTROL OF CONT | 74662 tesa® PRO Strong Duct Tape | **** | *** | *** | | 32 |
| Tesa Film | 74613 tesa® PRO Duct Tape | ••• | ** | • | | 33 |
| 1007 - 165 - 110 | 4662 tesa® Strong Duct Tape | **** | *** | *** | | 33 |
| William Willia | 4665 tesa® Outdoor Transparent Cloth Tape | •••• | | ••• | ••• | 34 |
| | 4668 tesa® Transparent PE- Repairing Tape | **** | *** | *** | | 34 |
| | 63652 tesa® Aluminium Tape Strong | | *** | *** | | 35 |
| OK Good | 63632 tesa® Aluminium Tape Universal Outstanding | •••• | ■ ■ Perfect | •• | **** | 35 |

tesa® Premium Cloth Tape 4651

Repairing, fixing, bundling and marking in industry and trades



- > Extremely tear- and abrasion-resistant
- > Can be written on
- > Universal adhesive
- Protection against sharp-edged objects (occupational safety)
- > Weatherproof, flexible
- > Temperature resistant up to 130 °C
- Mesh: 148 threads/inch²



Where? Smooth and rough surfaces

Why? The Premium Cloth Tape is suitable for a

variety of jobs in all trades

Result Outstanding results thanks to universal

suitability

| Dimensions and packaging | | | | | | | |
|--------------------------|-----------------------------|------|------|------|--|--|--|
| m:mm | 25:19* 50:25* 50:38* 50:50* | | | | | | |
| Rolls IP/PU | 16/96 | 6/36 | 4/24 | 3/18 | | | |
| PU/Pallet | 24 | 28 | 28 | 28 | | | |
| Colours | | | | | | | |







*without printed label

tesa® PE-Coated Cloth tape

Masking, packaging, protecting and fixing



- > Good adhesion, even on rough surfaces
- > Tear-resistant
- > Easily torn by hand
- > Mesh: 55 threads/inch²



Where? Smooth and rough surfaces

Why? Particularly abrasion-resistant and tempera-

ture-resistant up to 110 °C

Result Secure adhesion of all kinds

| Dimensions and packaging | | | | | | |
|--------------------------|-------|--------|-------|--------|--------|--------|
| m:mm | 25:50 | 50:50* | 50:50 | 50:25* | 50:38* | 50:75* |
| Rolls IP/PU | 5/20 | -/18 | -/18 | -/36 | -/24 | -/12 |
| PU/Pallet | 32 | 40 | 40 | 40 | 40 | 40 |
| Colours | | | | | | |
| 55 T | | | | | | |







*without printed label

Fastening, sealing, bundling



- > Very strong adhesion
- > Extra tear-resistant, better removability
- Sticks to rough surfaces thanks to the thick layer of adhesive
- > Mesh: 34 threads/inch²



Where? Rough surfaces such as brick, concrete,

plaster and heavy tarpaulin

Why? Versatile applications: Fastening, sealing,

bundling, etc.

Result Secure hold, even on difficult, dirty surfaces

| Dimensions and packaging | | | | | |
|--------------------------|------------------|--|--|--|--|
| m:mm | 50:48 | | | | |
| Rolls IP/PU | - /24 | | | | |
| PU/Pallet | 24 | | | | |
| Colours | | | | | |
| 34. | | | | | |







Pro Tip

The perfect peel

Four factors contribute to perfect removal:

- The right angle Always pull at an acute angle to the surface. Ideally at a 45° angle.
 The larger the angle, the higher the risk of residues remaining on the surface.
- 2. The right speed Never pull off suddenly! Work slowly and steadily to minimise the risk of tearing or leaving behind adhesive residues.
- **3.** The right ambient temperature The surface temperature should be at least 5 °C, otherwise the backing material and adhesive will become brittle. This increases both the tape's tendency to tear and the risk of adhesive residues.
- **4.** The right time Ideally immediately after the paint has set, but before it has fully dried.

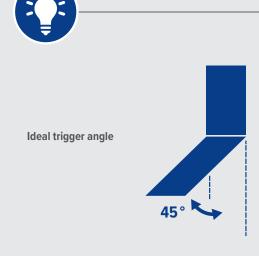



tesa® PRO Strong Duct Tape

74662

Adhesion where other tapes do not hold



- > Strong adhesion, also on rough surfaces
- > Easy to tear by hand
- > Easy to unroll
- > Easily tearable by hand with a straight tear-off edge
- > Comfortable handling
- > Mesh: 27 threads/inch²



Where? On smooth and textured surfaces in the

construction trade, e.g. concrete and masonry (important: always perform a test

adhesion)

Why? Outstanding adhesion, can also be used on

slightly dusty surfaces

Result Secure adhesion

| Dimensions and packaging | | | | | |
|--------------------------|-------|-------|--|--|--|
| m:mm | 50:50 | 50:38 | | | |
| Rolls IP/PU | -/24 | 8/32 | | | |
| PU/Pallet | 32 | 32 | | | |
| Colours | | | | | |
| 27. | | | | | |







tesa® PRO Duct Tape

74613

Applications such as fastening, sealing, marking, bundling



- Good adhesion
- > Easily torn by hand
- Versatile
- Water-repellent
- > Mesh: 27 threads/inch²



Where? On smooth and lightly textured surfaces in

the construction trade, e.g. concrete and masonry (important: always perform a test

adhesion)

Why? Fastening and joining of covering and pro-

tective materials. For bundling and marking

Result Secure, reliable hold

| Dimensions and packaging | | | | | |
|--------------------------|------------------|--|--|--|--|
| m:mm | 50:50 | | | | |
| Rolls IP/PU | - /24 | | | | |
| PU/Pallet | 32 | | | | |
| Colours | | | | | |
| | | | | | |





tesa® Strong Duct Tape

4662

Concrete formwork, fastening of construction tarpaulins



- > Masking on rough, slightly dusty surfaces
- Concrete formwork (contrasting yellow)
- > Fastening of construction tarpaulins
- > Easily tearable by hand with a straight tear-off edge
- > Comfortable handling
- > Mesh: 27 threads/inch²



Where? On rough, slightly dusty surfacesWhy? Good contrast with grey concrete

Result Secure hold and high recognition thanks to

contrasting yellow

| Dimensions and packaging | | | | | |
|--------------------------|-------|-------|--|--|--|
| m:mm | 25:48 | 50:48 | | | |
| Rolls IP/PU | -/24 | -/24 | | | |
| PU/Pallet | 48 | 36 | | | |
| Colours | | | | | |
| 27 | | | | | |









tesa® Outdoor Transparent Cloth Tape 4665

Long-term, weather resistant fastenings



- Very strong adhesion
- Transparent
- > Weather and UV-resistant for up to 12 months
- Odourless



Where? Smooth and lightly textured surfaces

Why? The transparent tape is nearly invisible and

extremely robust

Result Durable and weather resistant bonds

| Dimensions and packaging | | | | | |
|--------------------------|-------|--|--|--|--|
| m:mm | 25:48 | | | | |
| Rolls IP/PU | 6/24 | | | | |
| PU/Pallet | 48 | | | | |
| Colours | | | | | |
| | • | | | | |









tesa® Transparent PE-Repairing Tape 4668

Repairs of transparent surfaces and surface protection



- > Highly resistant to weathering and aging
- > Ideal for connecting construction tarpaulins and films
- > Designed especially for the bonding of LDPE films
- > UV-resistant for 8 months



Where? Plastics and similar surfaces

Why? Particularly abrasion-resistant and resistant

to chemical influences

Result Strong, robust and nearly invisible repairs

| Dimensions and packaging | | | | | |
|--------------------------|-------------|-------------|--|--|--|
| m:mm | 33:50 | 33:100* | | | |
| Rolls IP/PU | -/18 | -/12 | | | |
| PU/Pallet | 70 | 48 | | | |
| Colours | | | | | |
| | | | | | |









*without printed label

tesa® Aluminium Tape Strong 63652

Permanent sealing of insulation and pipes



- > Suitable for permanent applications
- > Extremely robust, for professional use
- > Electrically and thermally conductive
- Resistant to moisture, gases, vapours and UV-radiation; flame-retardant and temperature resistant
- > Temperature-resistant from −40 °C to +150 °C



Where? On insulation, pipes and metal surfaces

Why? Electrically and thermally conductive,

reflects thermal radiation

Result Permanently sealed and insulated surfaces

| Dimensions and packaging | | | | | | | |
|------------------------------|------|------|------|------|--|--|--|
| m:mm 10:50 25:50 50:50 50:75 | | | | | | | |
| Rolls IP/PU | 6/36 | 6/36 | 6/24 | 4/16 | | | |
| PU/Pallet | 48 | 36 | 32 | 32 | | | |
| Colours | | | | | | | |
| | | | | | | | |









tesa® Aluminium Tape Universal 63632

Permanent sealing of insulation and pipes



- > Suitable for permanent applications
- > Supple, conforms to uneven surfaces
- > Electrically and thermally conductive
- Resistant to moisture, gases, vapours and UV-radiation; flame-retardant and temperature resistant
- > Temperature-resistant from −40 °C to +150 °C
- > Easily tearable



Where? On insulation, pipes and metal surfaces

Why? Electrically and thermally conductive,

reflects thermal radiation

Result Permanently sealed and insulated surfaces

| Dimensions and packaging | | | | | | |
|--------------------------|------|------|------|--|--|--|
| m:mm 10:50 25:50 50:50 | | | | | | |
| Rolls IP/PU | 6/36 | 6/36 | 6/24 | | | |
| PU/Pallet | 48 | 36 | 32 | | | |
| Colours | | | | | | |







Whether for floor and carpet laying or mounting and installation work: The following products have been specially designed for extreme precision and efficiency, whatever the requirements.



Which tape does what in floor laying & mounting?

| | Product number | Adhesive strength | Removable | Page |
|--|--|-------------------|----------------|------|
| | 51960 tesafix® Double-Sided Tape Removable Extra Strong | •••• | 5 years | 38 |
| | 4939 tesafix® Double-Sided Tape Removable Universal | ••• | 2 weeks | 38 |
| | 4944 tesafix® Double-Sided Tape Permanent Extra Strong | | - | 39 |
| PRO | 64620 tesafix® Double-Sided Tape Permanent Universal | | - | 39 |
| MOUNTING WITH THE PROPERTY OF | 66792 tesa® PRO Mounting Tape Ultra Strong | | - | 40 |
| MOUNTING | 66728 tesa® PRO Mounting ACX ^{plus} MP | | - | 41 |
| MOUNTING | 66952 tesa® PRO Mounting Tape Mirror | | - | 42 |
| TO THE STATE OF TH | 66965 tesa® PRO Mounting Tape Transparent | | - | 42 |
| MOUNTING DEPOSIT INC. | 66751 tesa® PRO Mounting Tape Outdoor | | - | 43 |
| MOUNTING | 66714 tesa® PRO Mounting Tape Narrow | | - | 43 |
| MOUNTING | 66743 tesa® PRO Mounting Tape Wallpaper & Plaster | | - | 44 |
| MOUNTING CHAPTER A | 66958 tesa® PRO Mounting Tape Universal | | - | 44 |
| MOUNTING MOUNTING MOUNTING | 66957 tesa® PRO Mounting Tape PE-Foam | ••• | - | 45 |
| | Product number | Adhesive strength | Cleaning Power | Page |
| | 60020/21 tesa® Spray Glue Permanent | | - | 46 |
| | 60022 tesa® Spray Glue Extra Strong | | - | 46 |
| | 60040 tesa® Industrial Cleaner | - | ***** | 47 |
| Rd1 | 60042 tesa® Adhesive Remover | - | *** | 47 |

Outstanding

First-class

Perfect

tesa® Extra Strong Floor Laying Removable 51960

Laying of textile carpets and PVC flooring



- > Hand-tearable
- > Nearly residue-free removal
- Suitable for underfloor heating (temporarily 120 °C, permanently 60 °C)
- Solvent and plasticiser free
- > Suitable for CV and PVC



Where? For use on all common floorings (including

parquet), except natural and artificial stone

Why? Largely resistant to aging and plasticisers

(no discolouration of PVC/CV floorings)

Result Securely fixed carpets and floorings, resi-

due-free removal

| Dimensions and packaging | | | |
|--------------------------|-------|---------------|-----------|
| m:mm | 10:50 | 25:38* | 25:50 |
| Rolls IP/PU | 6/36 | 8/48 | 6/36 |
| | Clea | *without prin | ted label |

tesa® Universal Double-Sided Removable 4939

Powerful adhesion of carpets for e.g. trade fairs and exhibitions



> Hand-tearable

Result

- > Nearly residue-free removal
- Differential adhesion



Where? For use on all common floors, except natu-

ral/artificial stone and PVC/CV coverings

Why? High initial adhesion, removable nearly

residue-free for up to 14 days
Securely fixed carpets and floorings

 Dimensions and packaging

 m:mm
 10:50
 25:50

 Rolls IP/PU
 6/36
 6/24

tesa® Extra Strong Floor Laying Permanent 4944

For the laying of textile carpets, including needlefelt carpets



- Hand-tearable
- > Can also be used on heavily textured carpet backings



Where? Can be used on all common floors, except

natural/artificial stone and PVC/CV cover-

ings

Why? Especially suitable for rough and fibrous

surfaces

Result Securely fixed floor coverings

| Dimensions and packaging | | | | |
|--------------------------|-------|-------|--|--|
| m:mm | 10:50 | 25:50 | | |
| Rolls IP/PU | 6/36 | 6/24 | | |
| permanent | | | | |

tesa® Universal Double-Sided Permanent 64620

Universal tape for securing carpets and rugs



- > Hand-tearable
- > Fast, safe and easy adhesion
- > Solvent-free
- > Ideal for smooth carpet backings



Where? For use on all common floors, except natu-

ral/artificial stone and PVC/CV coverings

Why? The adhesive tape is characterised by its

high tack

Result Permanently secured carpets

| Dimensions and packaging | | | |
|----------------------------------|-------|-------|--------|
| m:mm | 10:50 | 25:50 | 50:50* |
| Rolls IP/PU | 6/36 | 6/24 | 1/24 |
| permanent *without printed label | | | |

For heavy objects





- > Ultra-strong hold of up to 10 kg per 10 cm of tape
- > For flat objects up to 10 mm thick
- > Ideal both indoors and outdoors*
- > Quick attachment with no waiting time



Where? On tiles, painted wood and

most plastics

Why? The strongest double-sided

adhesive tape from tesa®

Result Reliable hold even for heavy

objects

| Dimensions and packaging | | | | | |
|--------------------------|--------|-------|--|--|--|
| m:mm | 1.5:19 | 5:19 | | | |
| Rolls IP/PU | 12/72 | 10/60 | | | |
| | | | | | |

*Not UV-resistant; no direct contact with water



Pro Tip

Drill-free mounting

Thanks to the mounting tapes from tesa®, you can dispense with drill, rawlplugs and screws and avoid damage to hanging surfaces.

Applying the mounting tapes is simple and easy: After four quick steps, your objects can enjoy a firm, reliable hold!



Clean the surface with denatured alcohol or window cleaner to remove dust and grease.

Wait for the surface to dry before applying the mounting tape.



Apply each strip of tape vertically to the object.



Press down firmly with your fingers: Optimum adhesive strength is reached after five seconds of pressure.



Remove the protective film from the adhesive surface. Note:

Please do not touch the exposed adhesive surfaces as this may affect the performance of the adhesives.

tesa® PRO Mounting ACX^{plus} MP

66728

For high-end adhesion



- Industrial quality: Acrylate foam with "ACXPIUS MP" technology
- Sealing function with protection against dust and moisture
- Withstands temperature changes and temperatures from 5 to 200 °C
- Resistant to moisture, (certain) chemicals, plasticisers and UV light



Where? For mounting of materials with different

surface properties

Why? Secure and permanent adhesion due to

viscoelasticity

Result Powerful, durable bonds

| Dimensions and packaging | | | | |
|--------------------------|--------|-------|--|--|
| m:mm | 1.5:19 | 5:19 | | |
| Rolls IP/PU | 10/60 | 10/60 | | |
| elastic + Es | | | | |

tesa® PRO Mounting Mirror 66952

For mirrors and flat objects



- Long-term adhesion of mirrors (up to 70 × 70 cm and 4 mm thick)
- Adheres to tiles, painted wood, veneer, glass, steel and many metals and plastics
- > Also bonds rough with smooth surfaces



Where? Ideal for bathrooms and similarly humid

Why? Resistant to aging and moisture

Result Strong hold, including on tiles and glass

| Dimensions and packaging | | | |
|--------------------------|--------|-------|-------|
| m:mm | 1.5:19 | 5:19 | 10:19 |
| Rolls IP/PU | 12/72 | 16/96 | 16/96 |
| | | | |

tesa® PRO Mounting Transparent 66965

Near invisible attachment



- > Transparent, double-sided adhesive tape
- > Strong and extra thin: only 0.2 mm thick
- > Long-term temperature resistance up to 100 °C
- Ideal for smooth surfaces such as glass or tiles



Where? For flat objects indoors and outdoorsWhy? Resistant to moisture, plasticisers and UV

light

Result Impressive, nearly invisible adhesion

| Dimensions and packaging | | | |
|--------------------------|--------|-------|-------|
| m:mm | 1.5:19 | 5:19 | 25:19 |
| Rolls IP/PU | 12/72 | 12/72 | 8/48 |
| | | | |

tesa® PRO Mounting Outdoor

tesa® PRO Mounting Slim 66751 66714

For outdoor installations

- > Double-sided tape for secure attachments outdoors
- > Adheres to tile, metal and most plastics
- > Strong and weather resistant



Where? Outdoors

Why? Waterproof, UV and temperature-resistant

Result Strong adhesion of up to 1 kg per 10 cm of

tape

| Dimensions and packaging | | | | |
|--------------------------|--------|-------|--|--|
| m:mm | 1.5:19 | 5:19 | | |
| Rolls IP/PU | 12/72 | 10/60 | | |
| | | | | |

For cable ducts and decorations



- > Only 9 mm wide
- > Strong hold on both sides
- > Partially conformable to the surface



Where? On various indoor surfaces

Why? At only 9 mm thick, ideal for floor slabs or

cable ducts

Result Fast, permanent hold

| Dimensions and packaging | | | |
|--------------------------|-------|--|--|
| m:mm | 2x5:9 | | |
| Rolls IP/PU 10/60 | | | |
| | | | |

tesa® PRO Mounting Wallpaper & Plaster 66743

For textured, sensitive surfaces



- > Professional mounting tape for wallpaper & plaster
- > Permanent hold on textured surfaces
- > For flat objects up to 10 mm thick



Where? On textured, sensitive surfaces

Why? Specially designed adhesive tape structure

evens out irregularities

Result Perfect hold on plaster and wallpaper (ex-

cept vinyl and textile wallpapers)

| Dimensions and packaging | | | | |
|--------------------------|--------|-------|--|--|
| m:mm | 1.5:19 | 5:19 | | |
| Rolls IP/PU | 10/60 | 10/60 | | |
| | | | | |

tesa® PRO Mounting Universal 66958

All-rounder for indoor use



- > Double-sided mounting tape with foam backing
- For lighter objects such as imitation stucco and skirting boards
- > Evens out slightly rough surfaces
- Hand-tearable



Where? On smooth and lightly textured surfaces

Why? Conformable foam backing with good shear

strength

Result Reliable hold for lighter objects

| Dimensions and packaging | | | | |
|--------------------------|--------|------|--|--|
| m:mm | 1.5:19 | 5:19 | | |
| Rolls IP/PU | 12/72 | 8/48 | | |
| | | | | |



Pro Tip

Optimal storage

Even when not in use, you can ensure that your adhesive tapes will be able to perform their best. Proper storage maintains quality. Important aspects:

Storage temperature and duration.




Choose your product taking into consideration the following points:

- Adhesive tapes age much faster at higher storage temperatures. They should not, for example, be stored behind windscreens. High temperatures cause damage such as degradation of the adhesive, which can lead to increased adhesive residue upon removal.
- Adhesive tapes that have been stored too long or incorrectly can easily damage the surfaces to which they are applied.
- If rolls of adhesive tape are too warm or cold for application after storage, care should be taken to allow their temperature to adjust to the ambient temperature (10 20 °C) before use. This is particularly important for applications during frost or high temperatures.

tesa® PRO Mounting PE 66957

Durable mounting

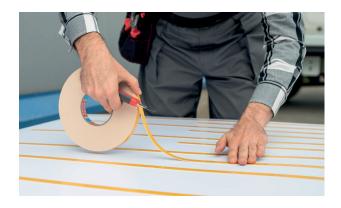

- > For a variety of applications both indoors and outdoors
- > Strong, immediate adhesion
- Waterproof, UV-resistant, non-aging, excellent cold shock absorption
- > For various surfaces, including glass



Where? For POS and trade fair sample displays,

shelf labels, cable ducts, glazing bars and

window strips

Why? Instant hold with maximum power

Result Reliable mounting, robust hold

| Dimensions and packaging | | | | | |
|--------------------------|-------------|-------|--|--|--|
| m:mm | 25:12 | 25:19 | | | |
| Rolls IP/PU | -/24 | -/16 | | | |
| 19 mm | | | | | |

tesa® Spray Glue Permanent

60020/21

Versatile, for permanent adhesion



- > Fast and precise adhesion of large areas
- > Fast-drying, moisture-resistant
- > Resistant to mechanical and thermal stress



Where? On many materials, e.g. paper, cardboard,

felt, fabric, films, foils, wood, leather etc.

Why? Strong, economical adhesion due to easy

dosing

Result Strong, durable bonds

| Dimensions and packaging | | | | | |
|--------------------------|-------------|-------------|--|--|--|
| ml | 300 | 500 | | | |
| Pieces IP/PU | -/12 | -/12 | | | |
| | | | | | |

tesa® Spray Glue Extra Strong

60022

Extra strong adhesion on rough and uneven surfaces



- > Strong bonds and good temperature resistance
- Good adhesion on non-polar surfaces
- Adjustable spray widths
- Thick adhesive stripe with minimal excess atomisation



Where? On many materials, e.g. plastic, insulation,

vinyl, imitation leather, carpet and rubber

Why? The vario nozzle allows regulated spray both

vertically and horizontally

Result Especially strong, permanent bonds

| | Dimensions and packaging | | | | |
|--------------|--------------------------|--|--|--|--|
| ml | 500 | | | | |
| Pieces IP/PU | <i>–/</i> 12 | | | | |
| ++ | | | | | |

tesa® Industry Cleaner 60040

Cleaning and preparation of surfaces before adhesion



- > Smells pleasant, evaporates without leaving any residue
- Dissolves stubborn soiling such as wax, oil, grease and silicone residues



Where? Glass, metal surfaces (e.g. machine parts)

plastics (check for tolerance before use)

Why? The spray can be applied to hidden, hard-

to-reach places

Result Clean surfaces

| Dimensions and packaging | | | | |
|--------------------------|------------------|--|--|--|
| ml | 500 | | | |
| Pieces IP/PU | - /12 | | | |
| | | | | |

tesa® Adhesive Remover 60042

Removal of adhesive residues



- > Smells pleasant, evaporates without leaving any residue
- Reliably removes residues from e.g. labels and adhesive tapes as well as grease, tar, resin and other soiling



Where? Glass, metal and plastic surfaces

Why? Excellent cleaning of machines and many

other surfaces

Result Reliable removal of the most stubborn

adhesive residues

| Dimensions and packaging | | | | |
|--------------------------|------------------|--|--|--|
| ml | 200 | | | |
| Pieces IP/PU | - /12 | | | |
| | | | | |



It's essential to mark and secure working areas and hazard zones. Our solutions are quick and impossible to overlook.



Which tape does what in marking & insulation?

| | Product number | Adhesive strength | Abrasion Resistance | Product thickness | Page |
|--|--|-------------------|---------------------|-------------------|------|
| | 60950-53 tesa® Anti-Slip Tapes | | ••••• | •••• | 50 |
| | 4169 tesa® Marking Tape Permanent | •••• | ***** | *** | 50 |
| | 60760 tesa® Marking Tape Temporary | •••• | ••• | ••• | 51 |
| TOTAL SOURCE STATE OF THE PARTY | 58137 tesa® Signal Tape Non-adhesive | - | - | •• | 51 |
| | 4600 tesa® Xtreme Conditions | - | + | •••• | 52 |
| | 4163 tesaflex® Premium Multi-purpose Tape | ••• | - | *** | 52 |
| | 53988 tesaflex® Electrical Insulation Tape, VDE/IEC | •••• | - | ••• | 53 |
| | 60077 tesa® Vapour Barrier Tape | •••• | - | •••• | 53 |

tesa® Anti-Slip Tapes 60950/51/52/53

For the non-slip finishing of treads



- Resistant to UV, temperature, (salt) water and detergents
- > Particularly abrasion-resistant, durable and robust
- > Excellent hold



Where? On steps, ladders, ramps etc.

Why? Anti-slip adhesive tapes guarantee a safe

step where there is a risk of slipping

Result Non-slip, colour-marked treads

| Dimensions and packaging | | | | | | | |
|--------------------------|--------------------|------|-----|-------|-------|-------|--|
| Item | 60950 | | | 60951 | 60952 | 60953 | |
| m:mm | 15:25 15:50 15:100 | | | 15:50 | 15:25 | 15:25 | |
| Rolls IP/PU | 6/36 | 3/18 | 3/9 | 3/18 | 6/36 | 6/36 | |
| Colours | • • • | | | | | _* | |
| *Fluorescent | | | | | | | |

tesa® Marking Tape Permanent

4169

High-quality, robust and durable floor markings



- > High adhesive strength, UV and weather resistant
- > Sturdy and robust PVC carrier, forklift-safe
- > Can be used as floor marking or warning tape, depending on colour choice



Where? Smooth and lightly textured floors, such as

transportation routes and play areas

Why? Fast, visible demarcation of indoor and

outdoor work areas

Result Reliable, stable floor markings

| | Dimensions and packaging | | | | | |
|-------------|--------------------------|--|--|--|--|--|
| m:mm | 33:50 | | | | | |
| Rolls IP/PU | 6/36 | | | | | |
| Colours | | | | | | |
| UV | 1.18 mm | | | | | |

tesa® Marking Tape Temporary 60760

tesa® Signal Tape Non-adhesive

58137

Floor marking and hazard identification



- > Excellent adhesion
- > Robust PVC tape with high abrasion resistance
- > Hand-tearable
- Can be used as floor marking or warning tape, depending on colour choice



Where? Smooth and lightly textured surfaces

Why? Easily visible hazard markings on mobile

and stationary objects

Result Stable markings for a high level of safety

in working areas

| Dimensions and packaging | | | | | | |
|--------------------------|--|--|--|--|--|--|
| m:mm 33:50 | | | | | | |
| 6/36 | | | | | | |
| Colours | | | | | | |
| | | | | | | |







Cordon off of construction sites or hazardous areas



- > Red and white printing on both sides
- > UV-stable for 3 months
- > Robust PE-film
- > Recyclable



Where? Construction sites, unfinished entrances, or

around newly sown lawns

Why? Quickly mark and cordon off closed areas

Result Clearly marked/ visible hazard zones and

restricted areas

| Dimensions and packaging | | | | | |
|--------------------------|--------|--|--|--|--|
| m:mm | 100:80 | | | | |
| Rolls IP/PU | 4/20 | | | | |
| Colours | | | | | |
| | | | | | |

tesa® Xtreme Conditions 4600

Fast repair of leaks and insulation of lines



- Instant hermetic sealing
- > Self-welding
- Dielectric strength: 8,000 volts
- Can also be used under water
- Extremely resistant to chemicals and liquids, UV-radiation and high/low temperatures



Where? Various blunt surfaces, including oily, dirty

or wet surfaces

Why? The flexible silicone tape fits to surfaces

perfectly

Result Permanent, absolutely secure seals

| | Dimensions and packaging | | | | | | |
|-------------|--------------------------|-------|-------|--|--|--|--|
| m:mm | 3:25 | 10:25 | 10:50 | | | | |
| Rolls IP/PU | -/16 | -/7 | -/3 | | | | |
| Colours | | • | - | | | | |
| -286°C | 800 | | | | | | |

tesaflex® Premium Multi-purpose Tape

4163

For insulation and marking of electrical installations



- > Strong adhesion
- > UV and temperature-resistant (up to 105 °C)
- > Dielectric strength: 7,000 volts
- > Resistant to acids and solvents



Where? All common cable materials and coresWhy? Universal repair and multi-purpose tape

Result Clearly visible markings

| Dimensions and packaging | | | | | | |
|--------------------------|-------|-------|--------|--------|--------|--|
| m:mm | 33:19 | 33:50 | 33:15* | 33:25* | 33:30* | |
| Rolls IP/PU | 5/120 | 3/36 | 10/120 | 6/72 | 5/60 | |
| Colours | | | | | | |
| *without printed label | | | | | | |

tesaflex® Electrical Insulation VDE/IEC 53988

Electrical installation and repair work



- > High breakdown voltage: up to 7,000 volts
- > Temperature resistant up to 90 °C
- > Available in nine different colours
- > Certificates: IEC 60454-3-1, VOC and others



Where? On all common cable materials and steel – even at low temperatures

Why? Thick backing material, high flexibility and excellent adhesive performance

Result Safe insulation of cables of all kinds, clear markings and strong cable bundles

| Dimensions and packaging | | | | | | | |
|--------------------------|--------|--------|--------|--------|--------|--------|-------|
| m:mm | 10:15 | 10:19 | 20:19 | 25:19 | 33:19 | 25:25 | 25:50 |
| Rolls IP/PU | 10/250 | 10/250 | 10/200 | 10/200 | 10/200 | 10/200 | 4/64 |
| Colours | | | | | | | |
| | A l | | | | | | |

tesa® Vapour Barrier Tape 60077

For vapour barriers, overlaps, joints and seams



- > Extremely high adhesion
- > Extremely resistant to aging
- > Simple, efficient and time-saving to use
- Certified according to Emicode EC1+, DIN 4108, RI.SE (P-Mark) and SINTEF



Where? On most vapour barrier films for new construction or roof renovation

Why? For the permanent sealing of overlaps,

joints, etc.

Result Secure, long-lasting bonds

| Dimensions and packaging | | | | |
|--|-------------|--|--|--|
| m:mm | 50:50 | | | |
| Rolls IP/PU | -/12 | | | |
| Colours | | | | |
| ECT IN THE PROPERTY OF THE PRO | *** | | | |



Whether packaging protective films or bundling unused materials, our professional solutions offer a wide range of applications.



Which tape does what in packaging and sealing?

| Product number | Adhesive strength | Tear resistance | Page |
|--|-------------------|-----------------|------|
| 4124 tesapack® PVC Premium | | | 56 |
| 4100 tesapack® PVC Comfort | | **** | 56 |
| 4024 tesapack® PP Universal | | *** | 57 |
| 6400 tesapack® COMFORT Hand Dispenser | - | - | 57 |
| OK Good Outstanding First-class | Perfect | | |

tesapack® PVC Premium 4124

Sealing medium-weight to heavy shipping boxes



- > Strong adhesion, extremely tear-resistant
- > Especially robust film backing
- Quiet unrolling



Where? Universal use on cardboard boxes of all

kinds

Why? Universally applicable, by hand or machine

Result Reliable sealing of boxes

| Dimensions and packaging | | | | | |
|--------------------------|------|----|--|--|--|
| m:mm | 66:! | 50 | | | |
| Rolls IP/PU | 6/3 | 6 | | | |
| PU/Pallet | 40 |) | | | |
| Colours | | | | | |
| | | | | | |









tesapack® PVC Comfort 4100

Universal PVC packaging tape with embossed film



- > Quiet and even unrolling
- > Highly suitable for machine handling
- > For all common hand dispensers



Where? On light and medium-weight cardboard

boxes

Why? Vey high initial adhesion enables fast

bonding

Result Well-sealed shipping boxes and bundles of

all kinds

| Dimensions and packaging | | | | | |
|--------------------------|-------|--|--|--|--|
| m:mm | 66:50 | | | | |
| Rolls IP/PU | 6/36 | | | | |
| PU/Pallet | 40 | | | | |
| Colours | | | | | |
| | | | | | |

tesapack® PP Universal 4024

Sealing light to medium-weight shipping cartons



- Quiet unrolling
- Solvent-free
- > Very high resistance to UV, aging and temperature
- > Excellent hold



Where? On light and medium-weight cardboard

ooxes

Why? Vey high initial adhesion enables fast

bonding

Result Well-sealed shipping boxes and bundles of

all kinds

| Dimensions and packaging | | | | | |
|--------------------------|-------|--|--|--|--|
| m:mm | 66:50 | | | | |
| Rolls IP/PU | 6/36 | | | | |
| PU/Pallet | 66 | | | | |
| Colours | | | | | |





tesapack® COMFORT Hand Dispenser 6400

For the safe and convenient handling of packaging tape rolls



- > Stable metal body
- Adjustable roller brake
- Concealed cutting edge (injury protection)
- Soft rubber grip for comfortable handling



Where? For all types of packages

Why? The robust and comfortable hand dispenser

enables a professional, efficient working

process

Result Perfectly sealed packages

| Dimensions and packaging | | | | |
|--------------------------|---------------------------------|--|--|--|
| mm | Packaging tape up to 50 mm wide | | | |
| Rolls IP/PU | 1/20 | | | |
| PU/Pallet | 12 | | | |
| Colours | • | | | |
| | | | | |
| | | | | |



High quality has its price – but sometimes it's the price that counts. Here you will find affordable options for simple jobs.



Which tape does what among the affordable alternatives?

| | Product number | Adhesion to smooth surfaces | Adhesion to rough surfaces | Quality of the paint edge | Adhesion duration (indoors) | Page |
|--|--|-----------------------------------|----------------------------|---------------------------|-----------------------------|------|
| | 4323 tesa® Masking Tape | *** | • | •• | 3 days | 60 |
| Toss II | 4325 tesa® Masking Tape Standard | • | | ** | 3 days | 60 |
| TO SOUTH THE PROPERTY OF THE P | 4403/4405 tesa® Easy Cover Standard | ••• | | ** | 3 days | 61 |
| | | | | | | |
| | Product number | Adhesion to smooth surfaces | Adhesion to rough surfaces | Product thickness | Hand tearability | Page |
| Description of the state of the | 4610 tesa® Basic Duct Tape | •••• | •• | | | 61 |
| OK Good | Outstanding | First-class | Perfect | | | |

tesa® Masking Tape

4323

Easy, uncomplicated painting jobs at moderate temperatures



- > Flat and lightly creped
- > Paper backing with natural rubber adhesive
- > Use for up to 3 days



Where? Simple masking and protection, bundling,

packaging, marking, lightweight fixing and

interior decoration

Why? Practical adhesion for simple, uncomplicat-

ed paint jobs at moderate temperatures

Result Good paint edges for standard applications

| Dimensions and packaging | | | | | | |
|------------------------------------|-------|-------|-------|------|------|--|
| m:mm 50:19 50:25 50:30 50:38 50:50 | | | | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | |
| PU/Pallet | 36 | 36 | 36 | 36 | 36 | |





tesa® Masking Tape Standard

4325

Simple painting and masking jobs as well as fixing, marking, packaging



- > Lightly creped
- > Quick and easy removal
- > Paper backing with natural rubber adhesive



Where? On smooth surfaces

Why? Practical adhesion for simple, uncomplicat-

ed paint jobs at moderate temperatures

Result Good paint edges for standard applications

| Dimensions and packaging | | | | | | |
|------------------------------------|-------|-------|-------|------|------|--|
| m:mm 50:19 50:25 50:30 50:38 50:50 | | | | | | |
| Rolls IP/PU | 16/96 | 12/72 | 10/60 | 8/48 | 6/36 | |
| PU/Pallet | 36 | 36 | 36 | 36 | 36 | |





tesa® Easy Cover Standard 4403/4405

Quick and inexpensive masking and protecting of large areas



- > For indoor applications
- Clean paint edges
- > For smooth and lightly textured surfaces
- > Standard film with a thickness of 8 μm
- > Standard paper with a thickness of 40 g/m²



Where?

Secure on flat surfaces such as skirting boards, window sills, stairs and furniture

Why?

The practical 2-in-1 solutions tesa® Easy Cover Standard 4403 and 4405 save time

and money

Result

Simple handling and clean paint edges

| Dimensions and packaging | | | | | | | |
|--------------------------|--------|------------|--------|--------|------|--|--|
| Material | | Film Paper | | | | | |
| m:mm | 25:550 | 25:1400 | 20:180 | 20:300 | | | |
| Rolls IP/PU | -/25 | -/20 | -/20 | -/25 | -/20 | | |
| PU/Pallet | 72 | 48 | 48 | 72 | 48 | | |
| | | | | | | | |









tesa® Basic Duct Tape

4610

Simple cloth tape with good adhesive properties



- > High initial adhesion
- > Easily torn by hand
- > Good adhesion to various materials
- > Easy to unroll
- > Mesh: 18 threads/inch²



Where? Universal use in industry and trades

Why? This basic duct tape offers good adhesion

to various surfaces

Result Secure hold, even on challenging, e.g. dirty,

surfaces

| Dimensions and packaging | | | | | |
|--------------------------|-------|--|--|--|--|
| m:mm | 50:50 | | | | |
| Rolls IP/PU | 6/24 | | | | |
| PU/Pallet | 48 | | | | |
| Colours | ■■ | | | | |
| | | | | | |



TECHNICAL SPECIFICATIONS

Masking & protection indoors

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|---|-------------------|-------------------|---------------------|---------------|
| 4334 | tesa® Precision Mask PLUS | 90 μm | 1.8 N/cm | 4% | 30 N/cm |
| 4344 | tesa® Precision Mask Standard | 90 μm | 1.7 N/cm | 4% | 30 N/cm |
| 4333 | tesa® Precision Mask Sensitive | 80 µm | 0.5 N/cm | 5% | 32 N/cm |
| 4338 | tesa® High-Performance Mask | 145 µm | 3.5 N/cm | 13 % | 43 N/cm |
| 4306 | tesa® Profi PLUS Masking Tape | 95 μm | 2.0 N/cm | 7% | 37 N/cm |
| 4348 | tesa® Painter's Tape | 140 µm | 3.3 N/cm | 10 % | 36 N/cm |
| 4331 | tesa® Silicone Masking Tape | 110 μm | 4.0 N/cm | 100% | 53 N/cm |
| 4319 | tesa® Masking Tape for Curves | 375 μm | 4.5 N/cm | 58% | 28 N/cm |
| 60101 | tesa® Fibreglass Tape | 185 µm | 0.5 N/cm | 5% | 50 N/cm |
| 4365 | tesa® Easy Cover Precision PLUS | 90 μm | 1.8 N/cm | 4% | 30 N/cm |
| 4402 | tesa® Easy Cover Precision Standard | 90 μm | 1.7 N/cm | 4% | 30 N/cm |
| 4401 | tesa® Easy Cover Precision Standard Paper | 90 μm | 1.7 N/cm | 4% | 30 N/cm |
| 4451 | tesa® Easy Cover Spray | 90 μm | 1.7 N/cm | 4% | 30 N/cm |
| 4368 | tesa® Easy Cover Universal | 140 µm | 3.4 N/cm | 10 % | 38 N/cm |
| 4364 | tesa® EasyCover Paper | 140 µm | 3.4 N/cm | 10 % | 38 N/cm |
| 4323 | tesa® Masking Tape Standard | 125 µm | 3.0 N/cm | 10 % | 33 N/cm |
| 4325 | tesa® Standard Masking Tape | 120 µm | 2.6 N/cm | 10 % | 33 N/cm |
| 4403 | tesa® Easy Cover Standard | 120 µm | 2.6 N/cm | 10 % | 33 N/cm |
| 4405 | tesa® Easy Cover Standard Paper | 120 µm | 2.6 N/cm | 10 % | 33 N/cm |

Masking & protection outdoors

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|--|-------------------|-------------------|---------------------|---------------|
| 4440 | tesa® Precision Mask Outdoor UV PLUS | 110 μm | 1.8 N/cm | 5% | 35 N/cm |
| 4411 | tesa® Easy Cover UV Precision | 110 μm | 1.8 N/cm | 5% | 35 N/cm |
| 4438 | tesa® UV Surface Protection Tape | 167 μm | 4.0 N/cm | 5% | 33 N/cm |
| 4370 | tesa® Cloth Duct Tape UV Extra | 310 μm | 4.4 N/cm | 10 % | 60 N/cm |
| 4363 | tesa® Plastering Cloth Tape UV | 310 μm | 3.6 N/cm | 11% | 60 N/cm |
| 4621 | tesa® Multi-purpose Outdoor Cloth Tape | 126 µm | 3.0 N/cm | 22% | 54 N/cm |
| 4398 | tesa® Basic Outdoor Cloth Tape | 260 μm | 5.0 N/cm | 20% | 55 N/cm |
| 4373 | tesa® Easy Cover UV Extra Strong | 310 μm | 4.4 N/cm | 10 % | 60 N/cm |
| 4369 | tesa® Easy Cover UV | 310 μm | 3.6 N/cm | 11% | 60 N/cm |
| 4498 | tesa® Easy Cover UV Basic | 260 μm | 5.0 N/cm | 20% | 55 N/cm |
| 4843 | tesa® Premium Plastering Tape Orange | 122 μm | 1.2 N/cm | 200% | 23 N/cm |
| 4845 | tesa® Professional PE Plastering Tape | 120 μm | 2.1 N/cm | 360% | 15 N/cm |
| 67001 | tesa® s-PVC Plastering Tape Embossed | 130 µm | 1.6 N/cm | 130% | 22 N/cm |
| 66001 | tesa® s-PVC Plastering Tape Smooth | 120 µm | 2.0 N/cm | 170 % | 22 N/cm |
| 60399 | tesa® s-PVC Plastering Tape Standard, Smooth | 120 µm | 2.0 N/cm | 170 % | 22 N/cm |
| 4836 | tesa® Double-Sided Masking Tape | 130 µm | 3.0 N/cm | - | 30 N/cm |
| 4848 | tesa® Surface Protection Film | 48 μm | 0.8 N/cm | 200% | 12 N/cm |

Repairing

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|----------------------------|-------------------|-------------------|---------------------|---------------|
| 4651 | Resarrium Cloth Tape | 310 μm | 3.3 N/cm | 13 % | 100 N/cm |
| 4688 | tesa® PE Coated Cloth Tape | 260 μm | 3.4 N/cm | 9% | 52 N/cm |
| 4663 | tesa® Premium Duct Tape | 290 μm | 4.8 N/cm | 18 % | 50 N/cm |
| 74662 | tesa® PRO Strong Duct Tape | 215 μm | 8 N/cm | 19 % | 40 N/cm |
| 74613 | tesa® PRO Duct Tape | 175 μm | 8 N/cm | 13 % | 40 N/cm |
| 4662 | tesa® Strong Duct Tape | 230 μm | 4.4 N/cm | 18% | 30 N/cm |

Repairing

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|--------------------------------|-------------------|-------------------|---------------------|---------------|
| 4665 | tesa® UV Cloth Tape | 215 μm | 9.0 N/cm | 27% | 43 N/cm |
| 4668 | tesa® PE Repairing Tape | 140 μm | 3.4 N/cm | 500% | 20 N/cm |
| 63652 | tesa® Aluminium Tape Strong | 90 μm | 9.0 N/cm | 6% | 40 N/cm |
| 63632 | tesa® Aluminium Tape Universal | 65 μm | 8.0 N/cm | 3% | 25 N/cm |
| 4610 | tesa® Basic Duct Tape | 150 μm | 4.5 N/cm | 20% | 30 N/cm |

Floor laying & mounting

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|---|-------------------|-------------------|---------------------|---------------|
| 51960 | tesafix® Double-Sided Tape Removable Extra Strong | 248 µm | 4.7 / 9.0 N/cm* | 80% | 30 N/cm |
| 4939 | tesafix® Double-Sided Tape Removable Universal | 235 µm | 5.0 / 7.5 N/cm* | 40% | 50 N/cm |
| 4944 | tesafix® Double-Sided Tape Permanent Extra Strong | 200 μm | 14.5 N/cm | 20% | 35 N/cm |
| 64620 | tesafix® Double-Sided Tape Permanent Universal | 185 µm | 9.5 N/cm | 700% | 30 N/cm |
| 66792 | tesa® PRO Mounting Tape Ultra Strong | 1150 µm | 15 N/cm | - | _ |
| 66728 | tesa® PRO Mounting Tape ACX Plus MP | 800 µm | 27 N/cm | - | _ |
| 66952 | tesa® PRO Mounting Tape Mirror | 1150 µm | 6.5 N/cm | 200% | 10 N/cm |
| 66965 | tesa® PRO Mounting Tape Transparent | 205μm | 11.5 N/cm | 50% | 20 N/cm |
| 66751 | tesa® PRO Mounting Tape Outdoor | 1140 µm | 12 N/cm | 500% | - |
| 66714 | tesa® PRO Mounting Tape Narrow | 1000 μm | 13.5 N/cm | 180% | 10 N/cm |
| 66743 | tesa® PRO Mounting Tape Wallpaper & Plaster | 1350 μm | 25 N/cm | _ | - |
| 66958 | tesa® PRO Mounting Tape Universal | 1050 μm | 4.0 N /cm | 200% | 7 N/cm |
| 66957 | tesa® PRO Mounting Tape PE-Foam | 1100 µm | 4 N/cm | 200% | 6 N/cm |
| Product number | Spray Glue | Type of Adhesive | Open Time | Temperatu | ire Range |
| 60020/21 | tesa® Spray Glue Permanent | synthetic rubber | < 10 min | -20 to +60 °C | |
| 60022 | tesa® Spray Glue Extra Strong | synthetic rubber | < 20 min | -30 to +80 °C | |
| Order number | Spray Cleaner | Solvent | Propellant | | |
| 60040 | tesa® Industrial Cleaner | isopropanol | propane/butane | | |
| 60042 | tesa® Adhesive Remover | isopropanol | propane/butane | | |

Marking & insulation

| Product number | Product title | Product thickness | Adhesive strength | Elongation at break | Tear strength |
|----------------|---|-------------------|-------------------|---------------------|---------------|
| 60950-53 | tesa® Anti-Slip Adhesive Tapes | 720 μm | 5.8 N/cm | 25% | - |
| 4169 | tesa® Marking Tape Permanent | 180 µm | 1.8 N/cm | 200% | 30 N/cm |
| 60760 | tesa® Marking Tape Temporary | 150 μm | 2.0 N/cm | 220% | 33 N/cm |
| 58137 | tesa® Signal Tape Non-adhesive | 30 μm | - | 382% | 8 N/cm |
| 4600 | tesa® Xtreme Conditions | 500 μm | - | 750% | 33 N/cm |
| 4163 | tesaflex® Premium Multi-purpose Tape | 130 μm | 1.8 N/cm | 250% | 30 N/cm |
| 53988 | tesaflex® Electrical Insulation Tape, VDE/IEC | 150 μm | 2.5 N/cm | 240% | 25 N/cm |
| 60077 | tesa® Vapour Barrier Tape | 290 μm | 12 N/cm | _ | _ |

Packaging & sealing

| Product number | Product title | Product thickness | Adhesion to steel | Elongation at break | Tear strength |
|----------------|----------------------------------|-------------------|-------------------|---------------------|---------------|
| 4124 | tesapack® PVC Premium | 65 μm | 3.2 N/cm | 60% | 60 N/cm |
| 4100 | tesapack® PVC Comfort | 65 μm | 2.2 N/cm | 75% | 47 N/cm |
| 4024 | tesapack® PP Universal | 52 μm | 3.0 N/cm | 140% | 45 N/cm |
| 6400 | tesapack® COMFORT Hand Dispenser | _ | _ | _ | _ |

^{*} First value = adhesive strength to the floor surface (open side)
Second value = adhesive strength to the floor covering (side with release paper)
The differing adhesive strength ensures that the adhesive can be removed from the floor surface.



L ICONS AT **GLANCE**

Masking & protection indoors and outdoors





















































Repairing

















Residue-free removal















Floor laying & mounting





































































































Marking &

insulation











































Packaging &

sealing













tesa® PROFESSIONAL

YOUR NAVIGATION SYSTEM FOR THE ASSORTMENT

Whether in the catalogue, on the products or on the shelf – our colour code is always the same.

So you can find the right tape even faster.







Pressing deadline, tricky job and demanding customers: Sound familiar to you? Find the information you need in the professional portal from tesa®, so you can always make the right decision with confidence – and deliver a clean result! tesa® is your partner when it has to be perfect.

Your shortcut to the best professional knowledge: www.tesa.com