

The background of the entire page is a photograph showing a person's hands applying a roll of black tesa ACXplus tape to a white window frame. The person is wearing a dark shirt. The tape is being unrolled from a roll, and a small white card with the tesa logo is being used to guide the application. The tape itself has "tesa ACXplus" printed repeatedly on its white backing.

Intelligent bonding products and applications


tesa® ACX^{plus} – the best performance for every task

Reliable technology

The high performance of tesa® ACX^{plus} is based on its viscoelastic properties. This special characteristic enables tesa® ACX^{plus} products to simultaneously act as a liquid and a solid: this provides increased inner strength and enables relaxation of mechanical stresses. This special acrylic system results in the following key features:


Bonding power

- For powerful long-lasting bonds – even on materials with different surface characteristics
- Wetting and chemical adaption to the bonded surfaces
- Tape thicknesses can be adjusted to compensate for rough and uneven surfaces

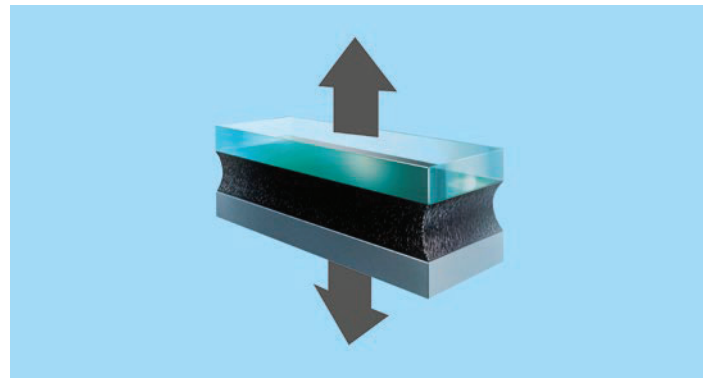


Stress dissipation

- tesa® ACX^{plus} has an outstanding ability to compensate static, dynamic and temperature stress, up to the life cycle of a component
- Due to the viscoelastic behavior stresses can be dissipated to ensure a secure bond
- Very high outdoor temperature changes are tolerated even when joined materials have different elongation factors

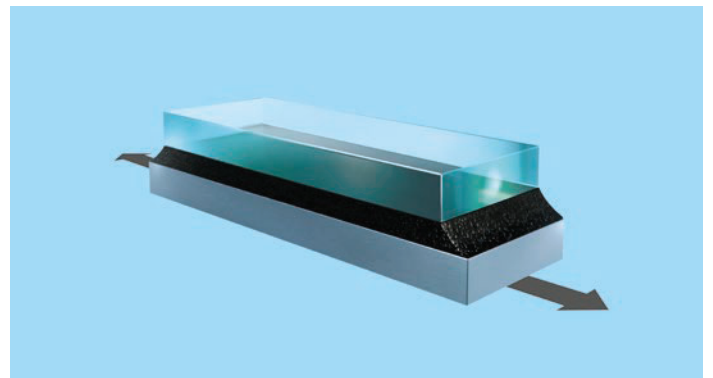

Temperature and weather resistance

- The bond can resist high temperatures, weather and other influences
- High degree of rust and corrosion resistance
- Curing chemistry forms an outstanding temperature resistance network

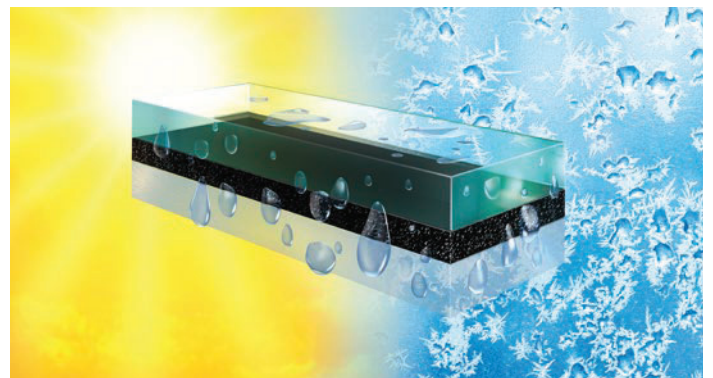



Constructive bonding indoors and outdoors

Permanent bonding is a key element in every industry and can be very challenging. For many applications high-tech materials are used which have special structures and properties that need to be maintained. Traditional mechanical fasteners like rivets, welds, screws, or liquid glue may not be suitable and can even damage these materials.

That is where our most innovative product idea comes into play: tesa® ACX^{plus}.

tesa® ACX^{plus} bonding solutions can outperform conventional fastening methods by optimizing our customers' production processes and the quality and aesthetics of their products.

Advantages of double-sided tapes vs. liquid glue and mechanical fastening

			Double-sided tapes	Liquid glue	Mechanical fastening (e.g. rivets, screws, nails)
					
Design		Improved visual appearance – no damage to the material	••••	•••	•
		Invisible fastening – mounting of transparent materials	••••	•••	•
Assembly		Fast application process – elimination of curing time and reduction of complexity	••••	•	••
		Healthy working environment and clean production sites	••••	••	••
Quality		Compensation of irregular or uneven surfaces – gaps between bonded surfaces are eliminated	•••	••••	•
		Compensation of tension and stress dissipation – single bonding point with mechanical fasteners can lead to material breakage	••••	••	•
		Noise-dampening properties – sounds caused by vibration are eliminated	••••	•••	•
		Shock absorption	••••	••	•
		Sealing function – tape seals and protects against dust and moisture	••••	••••	••
		Reduced risk of corrosion	••••	••••	•

•••• Very good ••• Good •• Medium • Low




tesa® ACX^{plus} 704x – Gray/White

tesa® ACX^{plus} 704x is an acrylic foam tape, available in gray or white. Due to the product's formulation, this double-sided acrylic foam tape combines high adhesion levels with the ability to absorb and dissipate high dynamic loads.

tesa® ACX^{plus} 704x is designed to bond decorative elements using invisible and seamless designs. The gray or white color options adapt very well to metal and plastic surfaces and avoid reflections on translucent and decorative elements.



Furniture




Flush design



Deco panels

tesa® ACX^{plus} 704x Gray/white




Product	Thickness without liner [µm]	Color	Liner version
tesa® ACX ^{plus} 7042	500	Gray or white	 PV28: Silicone-free film
tesa® ACX ^{plus} 7043	640		
tesa® ACX ^{plus} 7044	1,000		
tesa® ACX ^{plus} 7046	1,500		
tesa® ACX ^{plus} 7048	2,000		




tesa® ACX^{plus} 705x – High Transparency


tesa® ACX^{plus} 705x series is a transparent acrylic core tape. Due to the high transparency, walls it is ideal for constructive bonding of transparent and translucent materials such as glass or acrylic.



Partition walls



Plissee profile



Signage

Adhesive neutralized edges

Based on the requirements of the application we offer a specialized feature that removes the tackiness on the outer edges of the tape.

Benefits

- Easy handling of tape rolls in the assembly process
- Tape edges stay free of contamination from dust or dirt
- Premium optical appearance of the mounted partition wall
- Easy cleaning after installation

tesa® ACX^{plus} 705x High Transparency

Product

Thickness without liner [µm]

Color

Liner version



tesa® ACX^{plus} 7054

500

tesa® ACX^{plus} 7055

1,000

tesa® ACX^{plus} 7056

1,500

tesa® ACX^{plus} 7058

2,000

tesa® ACX^{plus} 75530

3,000


Transparent



PV48:
PE- film, branded

PV28:
Silicone-free film

PV12:
Transparent PET

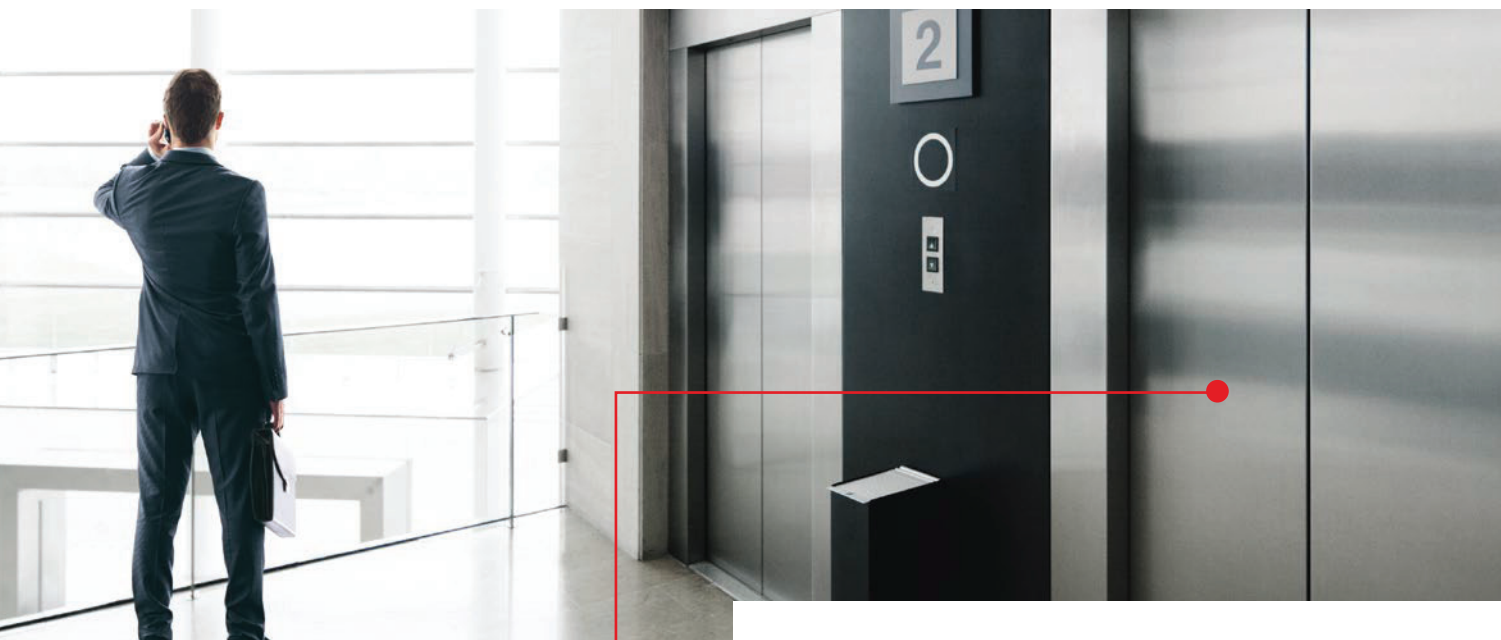

Decorative parts



Mirror mounting



Reinforcement bars

tesa® ACX^{plus} 706x – High Adhesion

tesa® ACX^{plus} 706x series is a deep black acrylic foam tape. It combines high adhesion levels with exceptional resistance against plasticizer migration.

tesa® ACX^{plus} 706x is designed to join “hard-to-bond-materials” such as powder coatings or plastic. Even for combinations of materials with various metals, or metal/metal-bonding, it offers a convenient solution due to its innovative product design and high process safety.

tesa® ACX^{plus} 706x High Adhesion

Product

Thickness without liner [µm]

Color

Liner version



tesa® ACX^{plus} 7062

500

tesa® ACX^{plus} 7063

800

tesa® ACX^{plus} 7065

1,200

tesa® ACX^{plus} 7066

1,500

Deep black




PV22:
PE-coated paper

PV24:
Film




tesa® ACX^{plus} 707x – High Resistance

tesa® ACX^{plus} 707x series is a deep black acrylic foam tape. It combines temperature resistance with outstanding cold shock resistance down to –40°C. It is designed for demanding outdoor bonding applications and performs best when used in combination with our adhesion promoters.



Stiff ener bars



Decorative panels




Door panels

tesa® ACX ^{plus} 707x High Resistance	Product	Thickness without liner [µm]	Color	Liner version
	tesa® ACX ^{plus} 7072	500	Deep black	tesa® ACX^{plus} 7072 tesa® ACX^{plus} 7074 tesa® ACX^{plus} 7076 tesa® ACX^{plus} 7078 tesa® ACX^{plus} 70725 tesa® ACX^{plus} 70730 tesa® ACX^{plus} 70740 PV22: PE-coated paper PV24: Film
	tesa® ACX ^{plus} 7074	1,000		
	tesa® ACX ^{plus} 7076	1,500		
	tesa® ACX ^{plus} 7078	2,000		
	tesa® ACX ^{plus} 70725	2,400		
	tesa® ACX ^{plus} 70730	2,900		
	tesa® ACX ^{plus} 70740	3,900		




PV22:
PE-coated paper

PV24:
Film

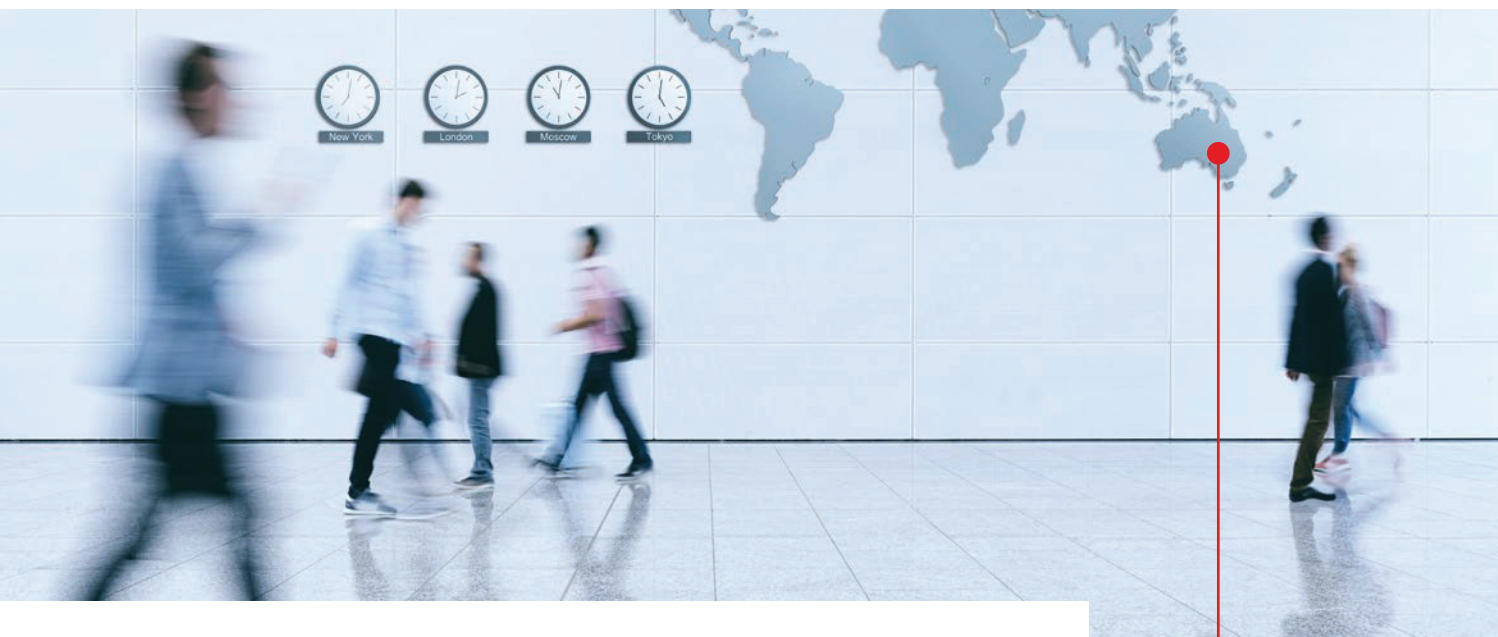

tesa® ACX^{plus} Multi Purpose (MP) tapes


The new tesa® ACX^{plus} Multi Purpose (MP) assortment is a true all-rounder and one of our most popular lines for converters and trade partner with ability to slit the logs. Due to their high viscoelasticity and excellent adhesion levels, the acrylic core tapes can absorb and dissipate stress and compensate the thermal elongation of bonded parts. They can therefore be used for a wide range of multi purpose bonding applications. The assortment is only available as log rolls.

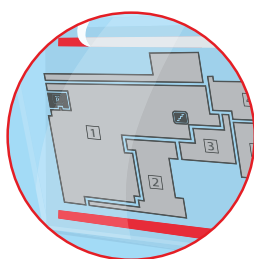

Mounting of transparent displays and signs



Mounting of emblems

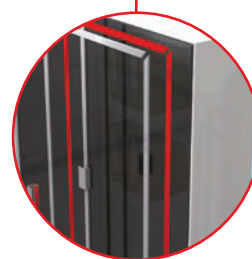


Mounting of decorative parts

tesa® ACX^{plus} Multi Purpose (MP) tapes

tesa® ACX ^{plus} Multi Purpose (MP) tapes	Product	Thickness without liner [µm]	Color	Liner version
	tesa® ACX ^{plus} 7254	500	Transparent	 PV42: PE-coated paper
	tesa® ACX ^{plus} 7255	1,000		
	tesa® ACX ^{plus} 7282	640	Black	
	tesa® ACX ^{plus} 7283	800		
	tesa® ACX ^{plus} 7284	1,100	Gray	 PV44: Film
	tesa® ACX ^{plus} 7272	640		
	tesa® ACX ^{plus} 7273	800		
	tesa® ACX ^{plus} 7274	1,100		

Instructions for use

Surface cleaning

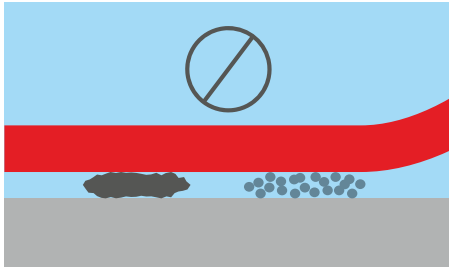

Remove contaminants

The surface should be free of dust, grease, oil, moisture and other contaminants, as they decrease the level of bonding power significantly.



Cleaning with solvents/water

Prepare the surface by using a clean, lint free cloth and appropriate cleaning agents. Suitable solvents include:

- tesa® 60040 Industry Cleaner
- Isopropanol
- Isopropanol and water (1:1)
- Acetone or MEK (methyl ethyl ketone)



Mechanical cleaning

Rust and other poorly sticking coatings should be removed. Using a suitable abrasive, slightly roughen the surface, keep in mind:

- The surface should remain even
- The corrosion protection layer should be unaffected


Afterwards the surface should be cleaned again using a solvent and lint free cloth.

Application




Applying the tape

Air bubbles cause imperfections in the application and should be avoided whenever possible. Reduce the occurrence of air bubbles by positioning the tape at one end of the surface and apply pressure to secure it to the surface. Use your thumb, a pressure roller, or a squeegee to apply pressure from one end to the other.

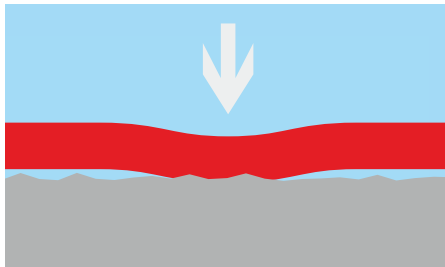

Bonding pressure

Pressure is essential for good adhesive performance because it secures contact between the tape and bonded area. After the final position is reached and both parts are mounted together, we recommend a uniform pressure of 1kg per 10mm over the complete area of the mounted components.

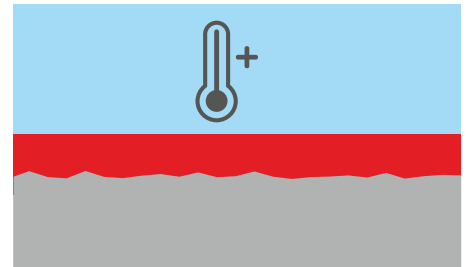

Processing temperature

At room temperature the tape meets the optimal conditions to completely bond to the surface structure. At lower temperatures (below 10°C) the adhesive becomes stiffer and optimum adhesion is difficult to reach. As a general rule, tape should be applied at temperatures between 10°C and 40°C.

Transportation & Storage


During transportation and storage ensure the tape does not come in contact with dust, dirt, or other contamination. Adhesive tapes should be stored at temperatures between 15°C and 35°C and avoid high humidity. Especially for tesa® ACX^{plus}, all slit edges should be covered with suitable separators made of siliconized film. If several rolls are stacked two sheets per roll should be used.

Technical overview

	Product number	Thickness without liner [µm]	Color	Adhesive Characteristics	Tape Design
tesa® ACX ^{plus} 704x Gray/White	tesa® ACX ^{plus} 7042	500	Gray or white	Foamed pure acrylic	
	tesa® ACX ^{plus} 7043	640			
	tesa® ACX ^{plus} 7044	1,000			
	tesa® ACX ^{plus} 7046	1,500			
	tesa® ACX ^{plus} 7048	2,000			
tesa® ACX ^{plus} 705x High Transparency	tesa® ACX ^{plus} 7054	500	Transparent	Solid pure acrylic	
	tesa® ACX ^{plus} 7055	1,000			
	tesa® ACX ^{plus} 7056	1,500			
	tesa® ACX ^{plus} 7058	2,000			
	tesa® ACX ^{plus} 75530	3,000			
tesa® ACX ^{plus} 706x High Adhesion	tesa® ACX ^{plus} 7062	500	Deep black	Foamed tackified acrylic	
	tesa® ACX ^{plus} 7063	800			
	tesa® ACX ^{plus} 7065	1,200			
	tesa® ACX ^{plus} 7066	1,500			
tesa® ACX ^{plus} 707x High Resistance	tesa® ACX ^{plus} 7072	500	Deep black	Foamed pure acrylic	
	tesa® ACX ^{plus} 7074	1,000			
	tesa® ACX ^{plus} 7076	1,500			
	tesa® ACX ^{plus} 7078	2,000			
	tesa® ACX ^{plus} 70725	2,400			
	tesa® ACX ^{plus} 70730	2,900			
	tesa® ACX ^{plus} 70740	3,900			
tesa® ACX ^{plus} Multi Purpose (MP) tapes	tesa® ACX ^{plus} 7254	500	Transparent	Solid pure acrylic	
	tesa® ACX ^{plus} 7255	1,000			
	tesa® ACX ^{plus} 7282	640			
	tesa® ACX ^{plus} 7283	800	Black	Foamed pure acrylic	
	tesa® ACX ^{plus} 7284	1,100			
	tesa® ACX ^{plus} 7272	640			
	tesa® ACX ^{plus} 7273	800	Gray	Foamed pure acrylic	
	tesa® ACX ^{plus} 7274	1,100			

Temperature Resistance		Elongation at break [%]	Adhesion [N/cm] after 72h dwell time		
short term	long term		Steel	Aluminum	Glass
200°C	120°C	700	25	25	22
		700	23	23	21
		500	33	32	30
		500	42	46	40
		500	36	40	43
200°C	100°C	1,000	18	18	20
		1,000	24	24	27
		900	24	26	27
		900	27	27	32
		800	31	31	35
170°C	70°C	1,000	24	27	27
		1,000	30	32	32
		1,000	40	35	36
		900	40	40	39
220°C	120°C	700	20	18	20
		700	30	25	32
		700	35	28	36
		700	40	32	40
		600	31	30	28
		600	44	38	39
		500	40	40	39
200°C	100°C	-	19	19	-
		-	24	24	-
		-	26	28	-
		-	27	28	-
		-	29	29	-
		-	28	30	-
		-	28	35	-
		-	32	31	-

Adhesion promoter

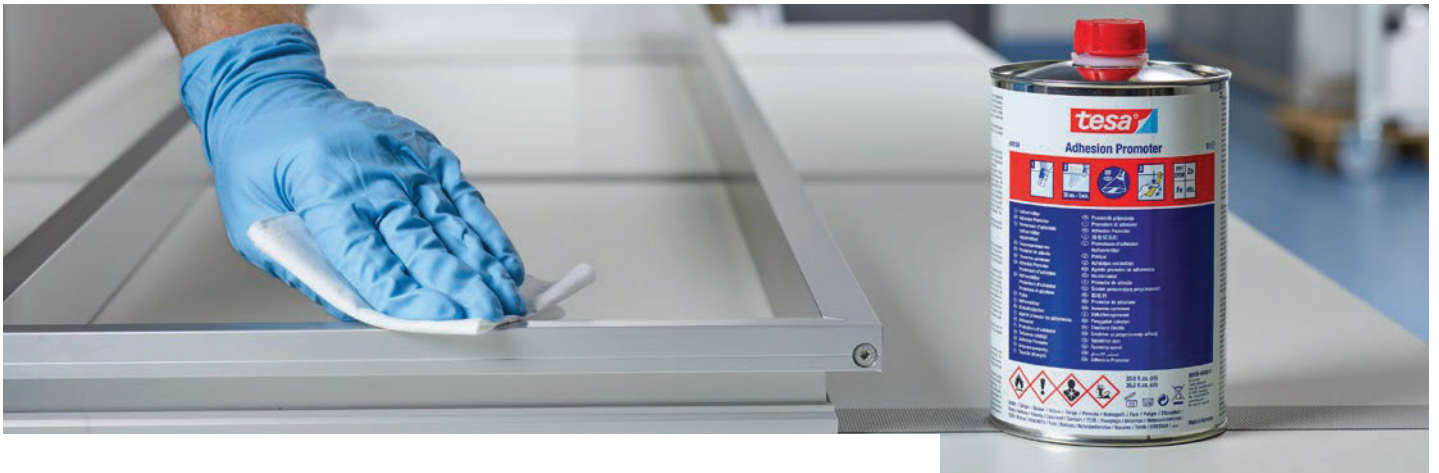

tesa® Adhesion Promoter – Surface pre-treatment for optimal bonding performance

tesa® 60150 Adhesion Promoter Universal

Our universal adhesion promoter is recommended for a broad variety of substrates including zinc, steel, and PP/EPD. Its UV-traceability allows easy quality control during the application process.

tesa® 60151 Adhesion Promoter Glass

This highly transparent adhesion promoter was specifically developed to ensure permanent bonding and moisture resistance on glass substrates.

tesa® 60152 Adhesion Promoter PU/HPVC

This adhesion promoter can be used to improve the adhesion on specific substrates such as PU (polyurethane) and HPVC (hard polyvinyl chloride/PVC-U/rigid PVC). Its UV-traceability allows easy quality control during the application process.

tesa® 60153 Adhesion Promoter Fast Cure

Our fast-curing adhesion promoter can be used on various surfaces, PP/EPDM (polypropylene/rubber blend). Its UV-traceability allows easy quality control during the application process.

tesa® 50690 Promoter Pen

Using the recommended promoter pen is an easy and fast solution. Its 15mm-wide felt-tip allows a clean and precise application of our adhesion promoters (not recommended for tesa® 60151 Adhesion Promoter Glass).

tesa® 60040 Industry Cleaner

tesa® Industry Cleaner 60040 is a versatile spray for fast and easy cleaning of machine and plastic parts, glass and metal surfaces. Cleaned surfaces allow for optimum bonding with tesa® adhesive tapes and spray glues.



Dispensing tools



Dispenser and application tools for our tesa® ACX^{plus} assortment

tesa® 6085 Easy Taper

The adjustable tape guide and side driver of our easy taper makes straight and curved lines possible. The maximum roll diameter is 300 mm and the maximum tape width is 25 mm.

tesa® 6003 Special Taper

Our special taper can be customized to the requested tape width. It allows precise positioning on a variety of parts. The maximum roll diameter is 300 mm and the maximum tape width is 50 mm.

tesa® 6025 Adjustable Teflon Edge Taper

Our adjustable Teflon Edge Taper allows quick and precise application on glass panels or partition walls while preventing air bubbles. The edge taper is manually adjustable and works on thicknesses ranging from 6 to 20 mm.

tesa® 6096 Spool Dispenser

The dispenser features an unwinding speed ranging from 0 to 26 m/min and makes efficient tape processing possible.

tesa® 6027 Pressure Roller

Our pressure roller helps apply a balanced amount of pressure throughout the tape, which leads to an increase on adhesion performance. The manual application helps minimize air bubbles.

tesa® 6003 Manual Pressure Device

The use of this manual pressure device helps to minimize air bubbles and leads to a uniform amount of pressure, which is required to ensure an optimal wetting result. The maximum tape width is 50 mm.



Reference projects




Duda Propaganda Office, Brazil
tesa® ACX^{plus} 7058



University Hospital Vitoria, Spain
tesa® ACX^{plus} 7058



Shell Monolights Kuala Lumpur,
Malaysia
tesa® ACX^{plus} 7074

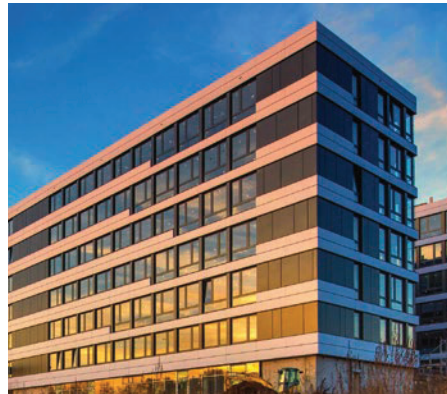

one tesa Hamburg, Germany
tesa® ACX^{plus} 7074



Schneider Building Montreal, Mexico
tesa® ACX^{plus} 70200



Kube Building Darwin, Australia
tesa® ACX^{plus} 7078



Cruise Ship, Germany
tesa® ACX^{plus} 7065



Busscar, Colombia
tesa® ACX^{plus} 7078


For more references please see our [tesa® ACX^{plus} Reference Book](#).

Confirmed and tested by independent institutes

	ETAG 003, Category IV Resistance to functional damage from hard body impact load – 0.5 kg steel ball. Resistance to functional damage from soft body impact load – 50 kg bag UN-EN ISO 140-3: Certificate for sound reduction index
	UL 746C
	DIN EN 13501-1:2012
	Static shear test including mathematical extrapolation up to ten years
	Dynamic tensile and shear measurements according to VE-08/1 ift DI-02/1-2: 2009-03
	Dynamic tensile measurement according to ETAG 002
	Static shear and static tensile load Creep measurement according to ETAG002
	LEED (EQ credit 4.1: Low-Emitting Materials: adhesive and sealants)
	Full part wind load test regarding ABNT NBR 10821-3/11
	AAMA 501.6-09 Earthquake Test
	STN EN ISO 6892-1 Road Sign
	ASTM E 284-04, 330-02, 331-00 Rain Screen Testing
	AS 4040.2/3, AS 4040.3 Cyclone Testing



tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

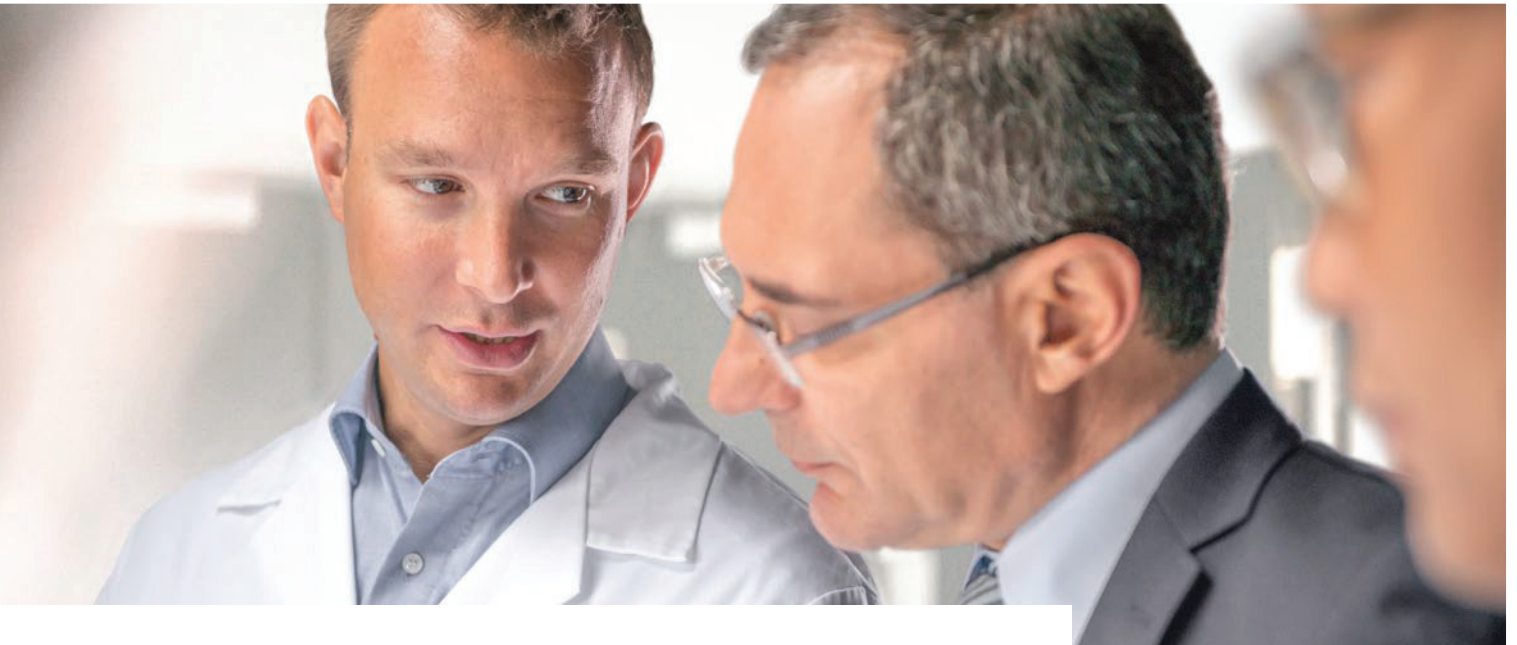

12/2021



Our management system is certified according to the standards ISO 9001, ISO/TS 16949, and ISO 14001.

tesa SE
Phone: +49 40 88899 0
tesa.com/company/locations

tesa.com