



The iconic tape

Your all-round mounting solution

Bond smarter



Mounting without compromise

The strength and flexibility of our bestselling tesa® 4965 Original have evolved into the specialized solutions and formats that industry needs. Welcome to the tesa® 4965 range.

Based on the original tape's adhesive technology, the tesa® 4965 range is a double-sided, acrylic, adhesive platform that delivers robust mounting across a diverse mix of applications—without any compromise. It really is the smarter way to bond.

- High peel adhesion
- High shear strength
- High tack
- Resistant to UV, humidity, and high temperatures

Adhesion you can rely on

No matter the substrate or task at hand, the tesa® 4965 range has been expertly developed to deliver a proven bonding performance every time.

- Meets all your permanent mounting, component mounting, and fixation needs.
- Used extensively in such industries as railways, aviation, energy storage, and construction.



For more information on the range, please see the technical specification for each solution.



Specialized solutions for industry

- **Fingerlift** for easier liner removal
- **High transparency** for optical clarity
- **Differential** for bonding dissimilar materials
- **Thin** for lightweight bonding in limited spaces
- **Thick** for shock absorption and extra adhesion
- **Transfer** tapes for greater conformity and securing laminations
- **Die-cut** for customized shapes delivering greater precision and efficiency




Gain adhesive
peace of mind

Bond smarter

Trust tesa®

With many decades of adhesive expertise, our tesa® 4965 range is one of the most extensively tested adhesive tape portfolios on the market. Certifications among individual solutions include:

- **UL 969 compliant** (File MH 18055) for applications in electronics and other industries
- **ISO 10993-10** (irritation & sensitization) medical contact certified
- Skin contact certification according to **ISO 10993-5 and ISO 10993-10**
- **Low VOC** – measured according to VDA 278 analysis
- **The DIN EN 45545-2 R1 certification** for railway industry fire safety

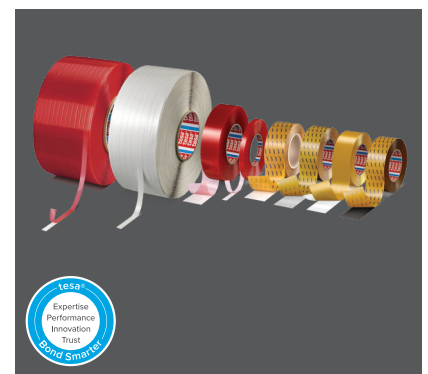

Supporting your production

At tesa, we understand exactly what manufacturers need from their adhesive tape provider and are focused on delivering the required solutions and specifications.

- High converting and automation efficiency (die cutting, spooling, slitting)
- Multiple liner types (MOPP, PET, glassine, PE-coated, double liner)
- Custom shapes for accuracy and reduced waste
- The reassurance of trusted technical expertise and support
- Reliable distribution through tesa’s global network of proven supply chains

Partner with progress

To discover why the tesa® 4965 mounting adhesive range is the first choice for industries around the globe, and to discuss your specific requirements with our experts, please get in touch.



For more information on the range, please see the technical specification for each solution.

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user’s method of application. If you are in any doubt, our technical support staff will be glad to support you.