






ACRYLIC FOAM TAPES

Superior Performance Tapes for Impact Resistant Applications

Key features



- Outstanding impact resistance
- Very high bonding strength
- Superior water-proofing
- High conformability and sealing ability
- Excellent gap-filling properties
- Good reworkability

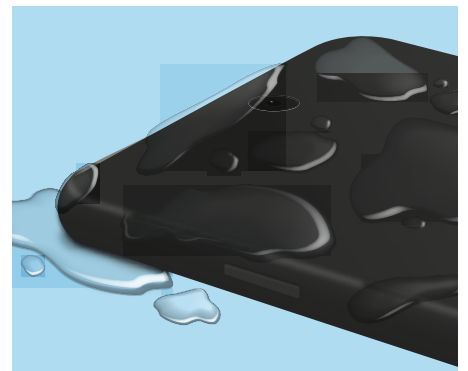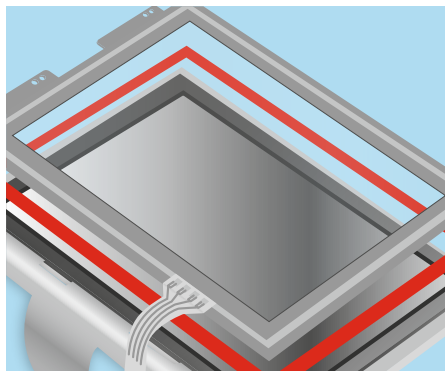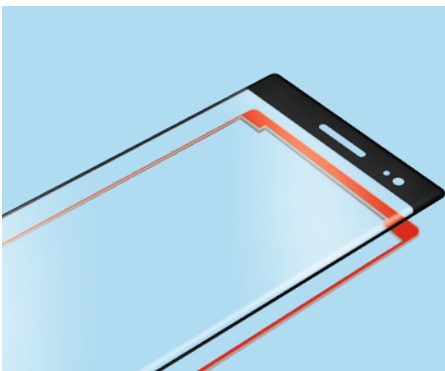

Typical applications

- Cover glass mounting in phones, tablets and computer
- Permanent battery bonding
- Mic and speaker sealing

Assortment overview

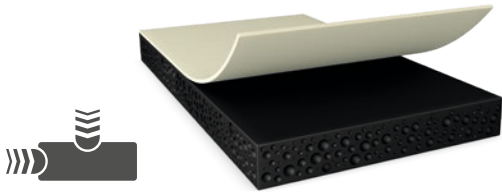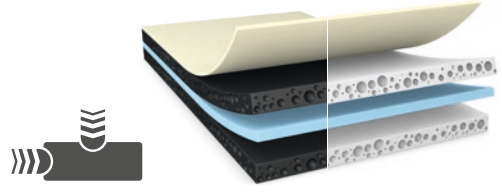	Flexible AC foam		Reinforced AC foam	
	tesa® 756xx series	tesa® 754xx series	tesa® 757xx series	
Product group description	 <p>Solutions for superior shock, conformability, and sealing abilities</p> <ul style="list-style-type: none"> • Excellent shock and bonding performance due to acrylic adhesive and cushioning foam • Very high conformability and high sealing abilities due to viscoelastic foam 		 <p>Solutions for superior shock and dynamic stress</p> <ul style="list-style-type: none"> • Excellent shock and bonding performance due to acrylic adhesive and cushioning foam • PET reinforcement allows good die-cutability, reworkability, and dimensional stability 	
Backing	—	—	PET	PET
Color	Black	Black	Black	White
Thickness in µm				
50		75405		
100		75410	75710	
150		75415	75715	
200	75620		75720	
230			75723	
250	75625		75725	75745
300	75630		75730	
350	75635		75735	

Notes:

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.