

APPLICATION GUIDE

Flush Design for Interior Fit-Out


Product list

- Aluminium frames and glass panel
- tesa® 60040 Industry Cleaner
- Lint-free cloth
- tesa® 60150 Adhesion Promoter for Aluminium
- tesa® 60151 Adhesion Promoter for glass
- tesa® 6025 Edge Taper
- Pressurization tools
- Protective gloves



1. Cleaning

- Clean the bonding area of glass panel and aluminium frame by using tesa® 60040 Industry Cleaner or isopropanol and a lint-free cloth.

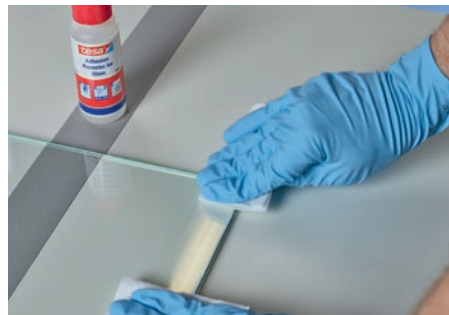

2. Priming of aluminium frames

- Prime bonding area of aluminium frame with tesa® 60150 Adhesion Promoter by using a lint-free cloth.
- Evaporation time of solvents is 30s to 5 min.

3. Priming of the glass panel

- Prime bonding area of uncoated glass panel with tesa® 60151 Adhesion Promoter by using a lint-free cloth.
- Immediately wipe dry with a clean cloth.

4. Application of tape to glass

- Apply tape using our tesa® 6025 Edge Taper.
- Only slight pressure required during application.
- Apply tape to all sides of the panel with an overlap in the corners.
- Precisely cut tape in corners to achieve optimum water seal.



Application Guide – Flush Design for Interior Fit-Out



5. Positioning of glazing blocks

- Lift and fold the ends of (the) liner in the corners of the panel (~ 5 cm).
- Position glazing block (3 mm thickness) in each corner.



6. Positioning the frame

- Place aluminium frame onto glass panel.
- Precisely align frame with panel.



7. Removing the liner

- Carefully remove glazing blocks.
- Remove liner using continuous low speed and low force.



8. Applying pressure

- Apply pressure onto glass side with appropriate pressurization tools, e.g. tesa® 6058 pressure roller.
- Ensure a minimum pressure of 10 N/cm².



9. Handling/ Shipping

- Final Product can immediately be handled and shipped.

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.