

Strapping Tapes for Safety and Security



strappingtapes

Our Strongest Tapes Are Designed to Protect



User Benefits

and brand perception.

We are one of the world's leading manufacturers of selfadhesive products and system solutions. As a global partner, we offer a wide range of adhesive tape solutions, aimed at reliable fixation, surface protection, packaging, and transportsecuring applications. Our innovative solutions are designed to protect valuable goods and to prevent damage.

To this end, our strapping tapes are based on custom-made tensilized polypropylene backings combined with proprietary

adhesive systems. Consequently, they offer just the right mix of strength, versatility, and reliability for a great variety of applications.

Strapping tapes are frequently used to protect delicate surfaces, fix loose parts, protect key components against shocks and mechanical stress during transport, and to bundle and palletize all sorts of transport units.

As a consequence, products and parts protected with

our tapes arrive undamaged and in mint condition at

distribution partners, retail shops, and at consumers,

meaning there is no need to handle costly and time-

consuming claims that could cause damage to reputation

Product	Key characteristics	Residue- free removal	Tensile strength [N/cm]	Backing thickness	Adhesive type	Total thickness [µm]	Adhesion [N/cm]	Elongation at break [%]
PREMIUM								
tesa® 4289	 Strong and sturdy backing Highly abrasion-resistant 	••••	420	••••	Natural rubber	144	5	35
tesa® 4288	 Highly heat- and cold-resistant Strong abrasion-resistance Good UV-resistance 	••••	300	•••	Natural rubber	114	5	35
tesa® 4298	 High adhesion level Highly stain- and adhesive- transfer-resistant 	••••	300	•••	Natural rubber	116	6.7	33
STANDARD								
tesa® 64284	 Highly stain- and adhesive- transfer-resistant Strong abrasion-resistance 	••••	300	•••	Natural rubber	110	4	35
tesa® 4591	 Highly tear-resistant cross filament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	140	9.5	4
tesa® 4590	 Monofilament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	105	9.5	4
BASIC								
tesa® 4287	 Highly heat- and cold-resistant Good conformability 	•••	180	••	Natural rubber	79	4	35
tesa® 64286	 Good conformability High adhesion level 	•	175	••	Synthetic rubber	73	7.5	35
SPECIALITY								
tesa® 64250	 Highly UV-resistant Good conformability Highly stain- and adhesive- transfer-resistant 	••••	100	•	Acrylic	79	3	30
tesa® 51128	 Typically removable from labels/cartons without causing damages 	•••	110	•	Natural rubber	62	1	30
					••• Ver	y good 🔹 • •	Good •• M	edium 🔹 Low

Product	Key characteristics	Residue- free removal	Tensile strength [N/cm]	Backing thickness	Adhesive type	Total thickness [µm]	Adhesion [N/cm]	Elongation at break [%]
PREMIUM								
tesa [®] 4289	 Strong and sturdy backing Highly abrasion-resistant 	••••	420	••••	Natural rubber	144	5	35
tesa® 4288	 Highly heat- and cold-resistant Strong abrasion-resistance Good UV-resistance 	••••	300	•••	Natural rubber	114	5	35
tesa® 4298	 High adhesion level Highly stain- and adhesive- transfer-resistant 	••••	300	•••	Natural rubber	116	6.7	33
S T A N D A R D								
tesa® 64284	 Highly stain- and adhesive- transfer-resistant Strong abrasion-resistance 	••••	300	•••	Natural rubber	110	4	35
tesa® 4591	 Highly tear-resistant cross filament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	140	9.5	4
tesa® 4590	 Monofilament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	105	9.5	4
BASIC								
tesa® 4287	 Highly heat- and cold-resistant Good conformability 	•••	180	••	Natural rubber	79	4	35
tesa® 64286	 Good conformability High adhesion level 	•	175	••	Synthetic rubber	73	7.5	35
SPECIALITY								
tesa® 64250	 Highly UV-resistant Good conformability Highly stain- and adhesive- transfer-resistant 	••••	100	•	Acrylic	79	3	30
tesa® 51128	 Typically removable from labels/cartons without causing damages 	•••	110	•	Natural rubber	62	1	30

Product	Key characteristics	Residue- free removal	Tensile strength [N/cm]	Backing thickness	Adhesive type	Total thickness [µm]	Adhesion [N/cm]	Elongation at break [%]
PREMIUM								
tesa® 4289	 Strong and sturdy backing Highly abrasion-resistant 	••••	420	••••	Natural rubber	144	5	35
tesa® 4288	 Highly heat- and cold-resistant Strong abrasion-resistance Good UV-resistance 	••••	300	•••	Natural rubber	114	5	35
tesa® 4298	 High adhesion level Highly stain- and adhesive- transfer-resistant 	••••	300	•••	Natural rubber	116	6.7	33
STANDARD	·							
tesa® 64284	 Highly stain- and adhesive- transfer-resistant Strong abrasion-resistance 	••••	300	•••	Natural rubber	110	4	35
tesa® 4591	 Highly tear-resistant cross filament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	140	9.5	4
tesa® 4590	 Monofilament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	105	9.5	4
BASIC								
tesa [®] 4287	Highly heat- and cold-resistantGood conformability	•••	180	••	Natural rubber	79	4	35
tesa® 64286	Good conformabilityHigh adhesion level	•	175	••	Synthetic rubber	73	7.5	35
SPECIALITY	,							
tesa® 64250	 Highly UV-resistant Good conformability Highly stain- and adhesive- transfer-resistant 	••••	100	•	Acrylic	79	3	30
tesa® 51128	 Typically removable from labels/cartons without causing damages 	•••	110	•	Natural rubber	62	1	30
					••• Ver	y good 🔹 • •	Good •• M	edium • Low

Product	Key characteristics	Residue- free removal	Tensile strength [N/cm]	Backing thickness	Adhesive type	Total thickness [µm]	Adhesion [N/cm]	Elongation at break [%]
PREMIUM								
tesa® 4289	 Strong and sturdy backing Highly abrasion-resistant 	••••	420	••••	Natural rubber	144	5	35
tesa® 4288	 Highly heat- and cold-resistant Strong abrasion-resistance Good UV-resistance 	••••	300	•••	Natural rubber	114	5	35
tesa® 4298	 High adhesion level Highly stain- and adhesive- transfer-resistant 	••••	300	•••	Natural rubber	116	6.7	33
STANDARD	·							
tesa® 64284	 Highly stain- and adhesive- transfer-resistant Strong abrasion-resistance 	••••	300	•••	Natural rubber	110	4	35
tesa® 4591	 Highly tear-resistant cross filament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	140	9.5	4
tesa® 4590	 Monofilament Very low elongation Strong adhesion level 	•	250	••	Synthetic rubber	105	9.5	4
BASIC								
tesa [®] 4287	Highly heat- and cold-resistantGood conformability	•••	180	••	Natural rubber	79	4	35
tesa® 64286	Good conformabilityHigh adhesion level	•	175	••	Synthetic rubber	73	7.5	35
SPECIALITY	,							
tesa® 64250	 Highly UV-resistant Good conformability Highly stain- and adhesive- transfer-resistant 	••••	100	•	Acrylic	79	3	30
tesa® 51128	 Typically removable from labels/cartons without causing damages 	•••	110	•	Natural rubber	62	1	30
					••• Ver	y good 🔹 • •	Good •• M	edium 🔹 Low

Product Features

The most important technical characteristics of our strapping tapes are the strong and sturdy backings that enable the tape to absorb high tensile strength while exhibiting low elongation. In combination with the unique adhesive formulations of tesa, a high level of residue-free removability after use is typical.

- Thick and strong backing
- High strength and low elongation
- Highly stain- and adhesive-transfer-resistant

In our application laboratories, we constantly analyze all kinds of materials in combination with our adhesive tape solutions. Depending on customer-specific demands, our analysis includes tests on resistance to high and low temperatures, peel adhesion, shock and tension absorption, and much more. The result: adhesive tape solutions that perfectly suit your needs.

Our products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All information and recommendations are provided to the best of our knowledge on the basis of our practical experience. Nevertheless, we can make no warranties, express or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. Therefore, the user is responsible for determining whether our product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical staff will be glad to support you.

securetransport

Protect Transport Units against Damage

Prevent Costly Claims Resulting from Transport Damage

Strong packaging tapes are commonly used to protect delicate surfaces, fix movable parts, and protect key components such as doors and hinges against damage caused by shocks and mechanical stress during moving and handling, transport, warehousing, and installation.

As a consequence, to prevent slipping, tearing, breaking, and residues, reliable transport-securing tapes need to be able to cope with all kinds of physical stress.

Otherwise, there is a high risk of costly damage that is frustrating for trading partners, dealers, and consumers. Apart from the negative user experience, there is also the costly handling of the damage and claims to take into account.



- High resistance against slipping, tearing, and breaking
- Strong protection against wear and tear
- Highly stain- and adhesive-transfer resistant


Benefits

- Reliable protection against transport damage
- Reduction of costs for handling of claims
- Positive end-user experience







Palletizing of boxes

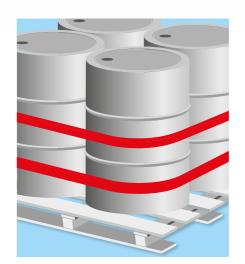

Securing of dangerous goods



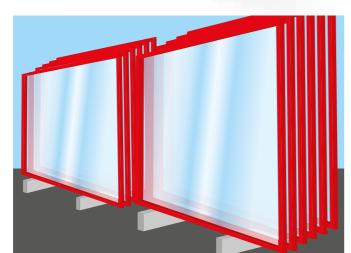

Protection of furniture for transport

Protection of glass edges

Safely Bundle and Palletize Transport Units

Before loose or packaged goods can be transported, they need to be bundled or palletized.

To prevent consignments from slipping, moving, and shifting, especially strong tapes with sturdy backings, allowing only minimal elongation while under pressure from mechanical and environmental stress, are needed.


In addition, excellent adhesion is required in order to make sure the tape stays in place on a variety of substrates, ranging from cardboard, metal and plastics, to difficult surfaces such as shrink-wraps and protective films.

Features

- Excellent adhesion to various surfaces
- Strong resistance against mechanical and environmental stress during transport
- Highly stain- and adhesive-transfer resistant (where needed)

Benefits

- High level of safety for personnel handling transport units
- Reduction of transport damage for freight carriers
- Reduction of costs for handling of claims for senders

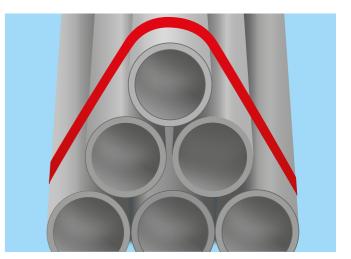

Bundling of pipes and steel tubes

strongprotection

Safeguard Delicate Surfaces and Hold Movable Parts in Place




Protection of window frame

Prevent Scratch Marks, Damage, and Dirt during Assembly and Installation


Before the assembly and installation of various parts and products, delicate surfaces need to be protected against scratches, stains, and dirt.

To be reliable for surface protection applications, tapes need to have a strong, sturdy backing that withstands many kinds of mechanical stress.

In addition, a special adhesive system is needed to enable adhesion to various surfaces and residue-free removability at the same time.



Galvanizing in the electrical industry

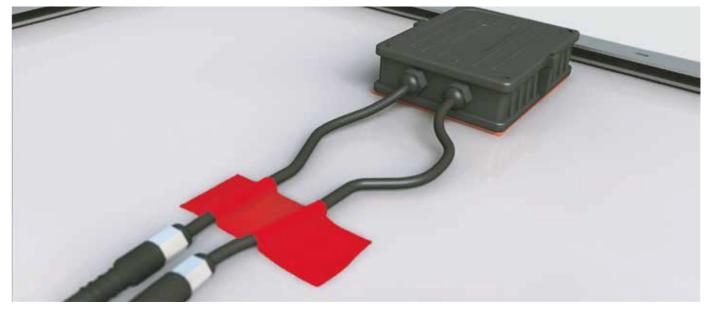

Cable fixation

Ensure Movable and Loose Parts Stay in Place

Temporary and permanent fixation is a common application in many industries.

Movable parts need to be firmly held in place during assembly operations, while loose parts often need to be permanently fixated for the lifetime of the end product.


Whether it is a permanent or temporary application, tapes that are suited for this type of application need to have a robust backing and also offer strong bonding to different surfaces. If the fixation is only temporary, the tapes need to be removable without residues.

Features


- Excellent adhesion to various surfaces
- High level of abrasion resistance during assembly and installation
- Highly stain- and adhesive-transfer resistant

Benefits


- Reliable protection against scratches, damage, and dirt
- Reduction of costs for replacement of damaged parts
- No need for cleaning and removal of scratch marks and dirt from delicate surfaces

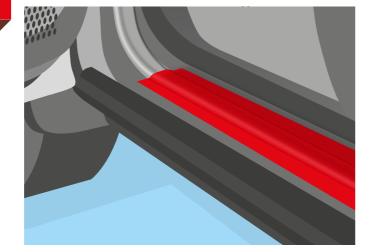

Frame protection during assembly

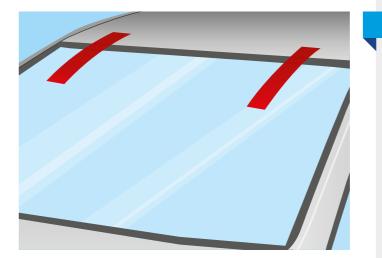

Temporary fixation during assembly



Coil tabbing in the metal industry

Features

- Excellent adhesion to various surfaces
- Strong resistance against mechanical and environmental stress
- Highly stain- and adhesive-transfer resistant

Benefits

- Reliable fixation of loose and moving parts
- Reduction of damage caused by loose parts during assembly
- Reduction of costs for repair and replacement of parts that become loose over time





Our management system is certified according to the standards ISO 9001, ISO/TS 16949, and ISO 14001.



tesa SE +49 40 88899 0 www.tesa.com/company/locations

