

The background of the entire page is a photograph of a supermarket aisle. On the right side, there are long refrigerated display cases filled with various food items. On the left, there are shelves stocked with products. In the foreground, a shopping cart is filled with fresh produce, including a large head of green lettuce wrapped in clear plastic, several yellow lemons, and a pineapple. The aisle is brightly lit with overhead fluorescent lights. The text "Creating added value - adhesive tapes for shopfitting and POS" is overlaid on the image in three stacked blue rectangular boxes with white text.

# Creating added value - adhesive tapes for shopfitting and POS


Double-sided adhesive tapes for trims and profiles

---

# The right adhesive tape solution for every application



Price scanner rails

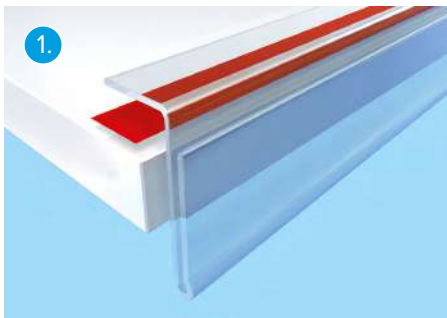

ESL rails








Bumper rails



Signs and marking systems




## Product description

Product		Application	Feature
<b>tesa® 9210x</b> <b>Serie HiP</b>		For applications with high requirements (e.g. for ESL rails, bumper rails)	<ul style="list-style-type: none"> <li>• HiP (High initial Performance) available in 500µm, 800µm and 1,200µm product thickness</li> <li>• Very good adhesion to plastics and difficult surfaces</li> <li>• Suitable for bonding at low temperatures down to 0°C</li> </ul>
<b>tesa® ACX<sup>plus</sup></b> <b>704x</b>		For applications with high requirements (e.g. bumper rails)	<ul style="list-style-type: none"> <li>• Available in thicknesses between 500µm and 2,000µm</li> <li>• Compensates for material stresses at different expansion coefficients</li> <li>• Very good adhesive strength on different material combinations</li> </ul>
<b>tesa® 65611</b> <b>InvisiBond</b> <b>One Lift Cold</b>		For residue-free removability (e.g. for price scanner rails, ESL rails and signs)	<ul style="list-style-type: none"> <li>• Secure bonding to a wide variety of surfaces</li> <li>• Bonding can be removed from the shelf surface without leaving any residue</li> <li>• Suitable for bonding at low temperatures up to -10°C</li> </ul>
<b>tesa® 62455</b> <b>Basic Line</b>		PE foam for standard applications (e.g. for price scanner rails and signs)	<ul style="list-style-type: none"> <li>• Secure bonding to a wide variety of surfaces</li> <li>• Optimal for bonding of light profiles such as PVC strips and rails</li> <li>• Suitable for bonding at low temperatures up to -10 °C</li> </ul>
<b>tesa® 51865</b> <b>Differential</b>		For bonding to light and smooth surfaces (e.g. for price scanner rails and small signs)	<ul style="list-style-type: none"> <li>• tesa® 51865 Differential is a thin double-sided PET adhesive tape with 165µm thickness and two different adhesive sides</li> <li>• Suitable for bonding to smooth surfaces</li> <li>• Thin and transparent backing material with good UV and temperature resistance</li> </ul>

## Technical data

Product	Thickness [µm]	Adhesive	Adhesive strength [N/cm] after 14 d exposure time (open/covered)			Temperature resistance [°C] (short/long)	Color
			Steel	PC	PE		
<b>tesa® 92108</b> <b>HiP</b>	800	Special mass	35	28	36	80/60	Black
<b>tesa® ACX<sup>plus</sup></b> <b>7044</b>	1,000	Pure acrylic	36	25	10	200/100	White/gray
<b>tesa® 65611</b> <b>InvisiBond</b> <b>One Lift Cold</b>	1,100	Modified acrylic	13	13	N/A	80/60	White
<b>tesa® 62455</b> <b>Basic Line</b>	1,000	Water-based acrylic	6	6	N/A	80/80	White
<b>tesa® 51865</b> <b>Differential</b>	165	Modified acrylic	11.5/13.3	12.0/15.0	7.0/8.0	200/100	Transparent

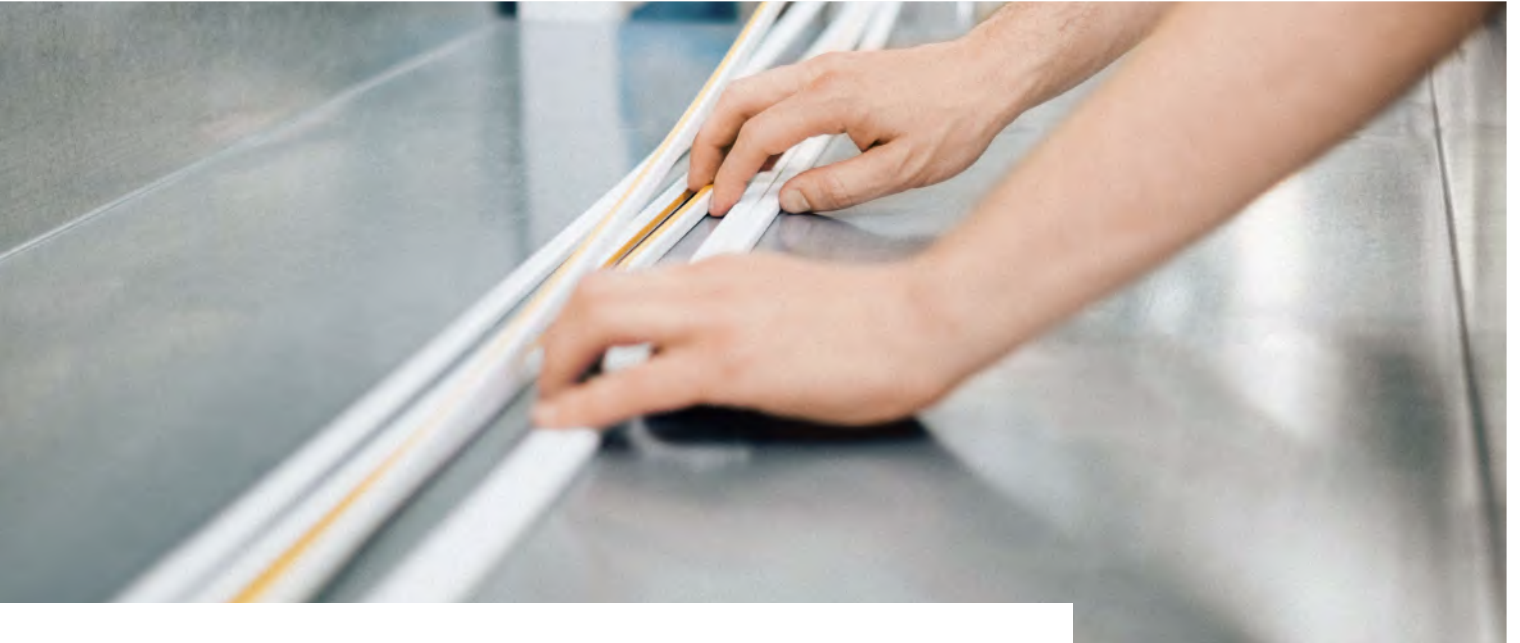

## Certifications

Our company is focused on international quality, environmental, and occupational safety standards.

Please find more information regarding our certifications at:  
[www.tesa.com/certifications](http://www.tesa.com/certifications)

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

tesa SE  
Phone: +49 88899 0  
[tesa.com/company/locations](http://tesa.com/company/locations)