



**PERFECT RESULTS
EVERY TIME**

#spraywithtesa

Efficient Masking for Spray Painting

MASKING SOLUTIONS

High-Quality Masking Tapes for Spray Painting



The importance of masking tapes and proper preparation whilst spray painting can be the difference between a 2 day job and a 3-4 day job. Masking correctly can save you time and your reputation, removing the need to touch up any overspray or paint bleeds that can be more frequent than when painting with a brush or roller. Masking can strongly impact efficiency and the overall quality of finish. Only the use of appropriate masking products that offer reliable quality, and using them in the correct way, can help to deliver optimal results.

Our masking tapes have been carefully developed through intense engagement with the professional decorating trade and have proven their outstanding quality each and every day in various applications.

The most common surfaces that need masking whilst spray painting are:

- Skirting boards and doors
- Windows - internal and external
- Walls and Ceilings
- Floors
- Light switches and plug sockets

This folder will help you to select the product best suited to your individual needs.

By using our products you will benefit from:







- A wide range to serve even the most demanding applications
- Easy selection, thanks to clear descriptions of the tapes, their properties, and fields of application
- Consistent and reliable quality that has been proven multiple times
- Technical customer service by experienced and highly skilled engineers

Overview – Surfaces and applications to consider when spray painting

Skirting boards and doors	<p>Skirtings and doors come in all shapes and sizes, most with an intricate design that's pleasing on the eye but tricky for the decorator. Your masking tape will need to be strong yet flexible to not tear whilst bonding to the contours and textures of the surface.</p>
Windows - internal and external	<p>Wood, aluminium and uPVC are some of the materials used to produce window frames. They all have different surface finishes and qualities. Keep this in mind when choosing your masking tape. Be mindful that UV rays can effect your tape when being used inside as well as outside.</p>
Walls and Ceilings	<p>Masking off large areas such as the walls and ceilings are key applications whilst spraying woodwork and doors, due to the large areas and the tricky nature of working on the ceilings and walls, masking has to be efficient and reliable. You need to be assured that the tape will not sag or creep when in place and only come down when you want it to.</p>
Floors	<p>Choosing the right tape to mask floors can be tricky. Is there a carpet to consider? Is it a wooden floor? Has the wooden floor been varnished? Or is the floor a certain type of ceramic tile? Choosing the correct tape here can save you having to carry out work at your own cost.</p>
Light switches and plug sockets	<p>When spray painting, the walls are a very focal point, so you have to make sure your finish is clean and sharp or it can easily be noticed. Masking light switches and plug sockets can easily be overlooked. As these are mostly plastic, any paintbleed can be spotted easily.</p>

MASKING SOLUTIONS

High-Quality Masking Tapes for Spray Painting

Product description and application	Product	Total thickness [μm]	Adhesion to steel [N/cm]	Elongation [%]	Available sizes
<p data-bbox="400 472 751 499">tesa Easy Cover® 4365 Precision</p>  <p data-bbox="92 875 193 898">Application</p> <ul data-bbox="92 898 587 992" style="list-style-type: none"> • The 2-in-1 solution for masking and protecting large areas • Flat, sharp edges to paint and lacquer • For smooth and slightly textured surfaces • 6 months residue free removal <p data-bbox="92 994 240 1016">Product features</p> <ul data-bbox="92 1016 715 1066" style="list-style-type: none"> • Combination of transparent, supple film and tesa® Precision Mask® 4334 • Embossed film for good paint adhesion 		90	1.80	4	<p data-bbox="1437 712 1517 806">33 m x 550 mm 1400 mm 2100 mm</p> <p data-bbox="1437 882 1517 927">17 m x 2600 mm</p> 
<p data-bbox="400 1335 911 1361">tesa Easy Cover® 4401 Precision Standard Paper</p>  <p data-bbox="92 1722 193 1744">Application</p> <ul data-bbox="92 1744 587 1839" style="list-style-type: none"> • The 2-in-1 solution for masking and protecting large areas • Flat, sharp edges to paint and lacquer • For smooth and slightly textured surfaces • 3 months residue free removal <p data-bbox="92 1841 240 1863">Product features</p> <ul data-bbox="92 1863 683 1937" style="list-style-type: none"> • Combination of high quality special paper and tesa® Precision Mask® Standard 4344 washi tape • Specially-coated paper for good bonding of paint and lacquer 		90	1.70	4	<p data-bbox="1437 1644 1517 1718">25 m x 180 mm 300 mm</p> 

Product description and application	Product	Total thickness [μm]	Adhesion to steel [N/cm]	Elongation [%]	Available sizes
tesa Easy Cover® 4369 UV					
 <p>Application</p> <ul style="list-style-type: none"> • The 2-in-1 solution for masking and protecting large areas outside • For clean, straight paint edges • For smooth and slightly rough surfaces • Ideal for covering windows during rendering, plastering and painting work <p>Product features</p> <ul style="list-style-type: none"> • Combination of transparent, supple film and tesa® 4363 UV cloth tape • Embossed film for good paint adhesion • UV resistant for 2 weeks 		310	2.50	10	14 m x 550 mm 1400 mm 1800 mm 2100 mm 2800 mm
					


Product description and application	Product	Total thickness [μm]	Adhesion to steel [N/cm]	Elongation [%]	Available sizes
tesa Easy Cover® 4373 UV Extra Strong					
 <p>Application</p> <ul style="list-style-type: none"> • The 2-in-1 solution for masking and protecting large areas outside • For smooth and slightly rough surfaces • Ideal for covering windows during rendering, plastering and painting work • For heavy-duty, long-term applications <p>Product features</p> <ul style="list-style-type: none"> • Combination of highly transparent, extra strong film and tesa® 4370 UV cloth tape • UV resistant for 8 weeks 		310	3.80	10	12 m x 550 mm 1400 mm 2100 mm
					

MASKING SOLUTIONS

High-Quality Masking Tapes for Spray Painting

	Product description and application	Product	Total thickness [μm]	Adhesion to steel [N/cm]	Elongation [%]	Available sizes
tesa® 4334 Precision Mask® Indoor for straight lines						
	<p>Application</p> <ul style="list-style-type: none"> Flat, sharp edges to paint and lacquer For smooth and slightly textured surfaces For high-quality painting and lacquering work <p>Product features</p> <ul style="list-style-type: none"> Thin but particularly tear-resistant and supple backing Slightly transparent backing facilitates very good, accurate positioning Traceless removal after up to 6 months indoors and up to 8 weeks outdoors 		90	1.85	4	50 m x 19 mm 25 mm 38 mm 50 mm
			   			
tesa® 4440 Precision Mask® Outdoor for straight lines						
	<p>Application</p> <ul style="list-style-type: none"> Flat, sharp edges to paint and lacquer For high-quality painting and lacquering work outside <p>Product features</p> <ul style="list-style-type: none"> Clean edges to paint and lacquer Also for adhesion to slight curves Resistant to tearing and easy to stretch UV resistant for 26 weeks 		110	1.80	5	50 m x 19 mm 25 mm 38 mm 50 mm
			   			
tesa® 4323 for general purposes						
	<p>Application</p> <ul style="list-style-type: none"> Clean edges to paint and lacquer For smooth and slightly textured surfaces For joining floor coverings and tabbing down loose tesa Easy Cover® film 		125	3.00	10	50 m x 19 mm 25 mm 38 mm 50 mm
			 			
tesa® 4325 for general purposes						
	<p>Application</p> <ul style="list-style-type: none"> Residue free removal up to 48 hours For smooth and slightly textured surfaces For joining floor coverings and tabbing down loose tesa Easy Cover® film 		120	2.60	10	50 m x 19 mm 25 mm 38 mm 50 mm
			 			

	Product description and application	Product	Total thickness [µm]	Adhesion to steel [N/cm]	Elongation [%]	Available sizes
tesa® 4836 double-sided masking tape						
	<p>Application</p> <ul style="list-style-type: none"> Enables the application of individual large area masking materials Protection for sensitive and delicate surfaces Protection when painting or plastering <p>Product features</p> <ul style="list-style-type: none"> Double-sided coated masking tape on a film backing with a white liner High UV resistance Residue free removal after up to 6 weeks Age resistant acrylic adhesive Hand tearable 		130	3.00	n/a	25 m x 25 mm
						
tesa® 4621 multipurpose cloth tape						
	<p>Application</p> <ul style="list-style-type: none"> Masking for the painting of facades, coating of floor markings, plastering, etc. Holding protective layers such as plastic films and paper sheets in place <p>Product features</p> <ul style="list-style-type: none"> Waterproof and weather resistant for up to 8 weeks High initial adhesion, yet easily repositioned Easily hand tearable 		126	3.00	22	50 m x 50 mm
						
tesa® 4848 UV surface protection for large areas						
	<p>Application</p> <ul style="list-style-type: none"> Self-adhesive film for protecting large areas e.g glass and flooring <p>Product features</p> <ul style="list-style-type: none"> Resistant to many chemical effects, mechanical damage and water High level of transparency UV resistant for 4 weeks 		48	0.80	200	100 m x 125 mm 250 mm 500 mm 750 mm 1000 mm
						
tesa® drop cloths						
	<p>tesa® 55614 PE drop cloth</p> <ul style="list-style-type: none"> Non-adhesive Protect flooring and furniture easily Tear resistant Recyclable PE film <p>tesa® 55616 Extra Strong drop cloth</p> <ul style="list-style-type: none"> Perforated every 1 meter 	 				20 m x 1.8 m 12 m x 2 m

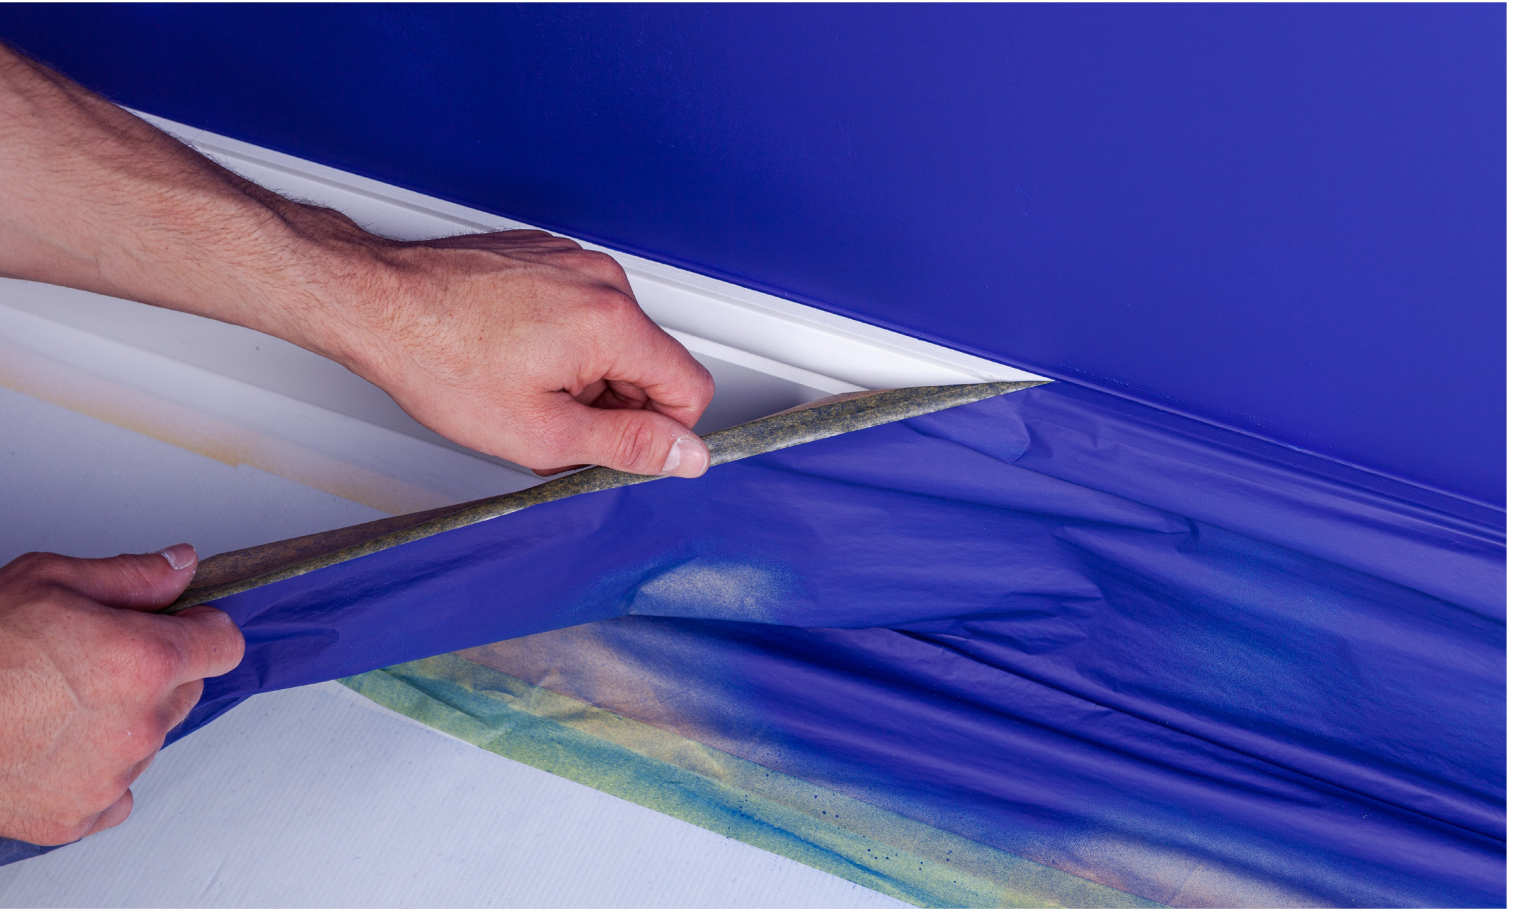

09-2020



Our management system is certified according to the standards
ISO 9001, ISO 14001 and ISO/TS 16949

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.

tesa UK Ltd
Phone: +44 1908 500333

[tesa.com](https://www.tesa.com)



tesaUK



tesaUK



tesaUK



tesaUK_tape

[tesa.co.uk/spraywithtesa](https://www.tesa.co.uk/spraywithtesa)